





THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.

LOC	DEF	REVISIONS	DATE	BY	APP
CM	00				
		DESCRIPTION			
		H3 REVISED PER ECR 13-011079	11 JUL 13	JR	KR

- 1 WIRE RANGE: 0.3-0.82mm² (22-18 AWG)
- 2 INSULATION RANGE: 1.50 - 3.10 DIA.
- △ FINISH: 0.76μm MINIMUM GOLD IN LOCALIZED GOLD PLATE AREA OVER 1.27μm MINIMUM NICKEL.
- △ FINISH: 2.54μm MINIMUM PRE-TIN IN LOCALIZED TIN PLATE AREA.
- △ FINISH: 2.54μm MINIMUM PRE-TIN ALL OVER.

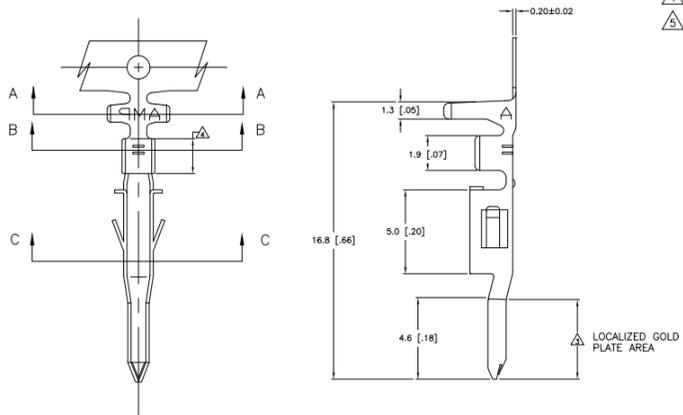

SECTION A-A

SECTION B-B

SECTION C-C

GOLD	PHOS. BRZ.	794955-4
PRE-TIN	PHOS. BRZ.	794955-3
GOLD	BRASS	794955-2
PRE-TIN	BRASS	794955-1
FINISH	MATERIAL	PART NO.

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.		DATE		TE Connectivity	
DESIGNED BY	J.S. HAMM	07-SEP-2001			
DRAWN BY	J.R. COLEY	07-SEP-2001			
CHECKED BY	J.R. COLEY	07-SEP-2001			
APPROVED BY					
PROJECT SPEC					
APPLICATION SPEC					
SIZE	A2	00779	794955		
SCALE	10:1				
SHEET	1 of 1				

