

# M 019464


# SCHEDA TECNICA

COUNTRY OF ORIGIN:  
Taiwan

STANDARDS:  
REACH and RoHS compliant  
Halogen free

UL listed

PHOTO / TECHNICAL DRAWING

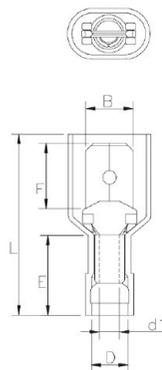

DIMENSIONS

Wire range	Part nr.	tab	B	F	L	E	D	d1	UL
22-16 AWG 0,5-1,5 mm <sup>2</sup>	M 019464	6,3x0,8	6,4	7,9	23,5	10,5	4,2	1,7	✓
16-14 AWG 1,5-2,5 mm <sup>2</sup>		6,3x0,8	6,4	7,9	23,5	10,5	4,9	2,3	✓
12-10 AWG 4-6 mm <sup>2</sup>		6,3x0,8	6,4	7,9	27,0	13,0	6,5	3,4	✓

TECHNICAL SPECIFICATIONS

Terminal: Brass, tin plated  
 Insulation: Nylon (PA 66)  
 Operating temperature: -40~105 °C  
 Max. electrical current: 300V  
 Max. electrical rating: red 10A

