






TYPE 102
SAME AS TYPE 101
EXCEPT AS SHOWN




TYPE 103
SAME AS TYPE 101
EXCEPT AS SHOWN

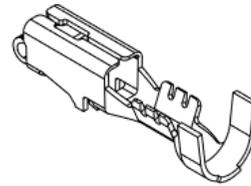

VIEW TO X-X

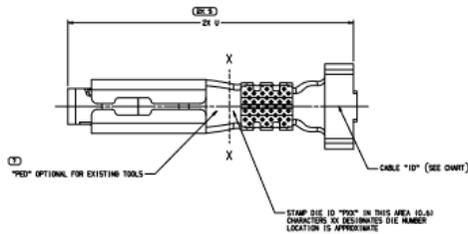

VIEW TO X-X

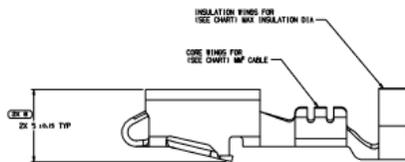

TYPE 101

NOTES

- UNLESS OTHERWISE SPECIFIED AND/OR INDICATED:
DIMENSIONS ARE TO FACE OF WIRE SHOWN AND AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION (SEE MATH MODEL FOR PRECISION DIMENSIONS). FOR ALL OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL BUILDS, SEE MATH MODEL FOR PRECISION TOOL PATH DATA.
- R 0.4 PERMISSIBLE ON ALL "SHARP" CORNERS.
- RECOMMENDED MATING BLADE 2.0 X 0.01.
- TERMINALS TO CRIMP AROUND AND RETAIN CAVITY SEAL. (DOES NOT CRIMP).
- "P0" INDICATES 10P PLUS LAST TWO DIGITS OF MAKE SERIES NUMBER (P01, P02, P03, ETC.).
- DO NOT PROBE, TEST OR OTHERWISE CONTACT THE INTERIOR REGION (THE SPRING OR MOVING PARTS) OF THIS TERMINAL, SEVERE DAMAGE CAN OCCUR, COMPROMISING THE PERFORMANCE OF THE ELECTRICAL INTERFACE.
- FOR TERMINALS PACKAGED & STORED IN THE APPROVED MANNER, TENSILE OR SILVER PLATED SURFACES WILL NOT AFFECT THE PERFORMANCE OF THE PART.

