
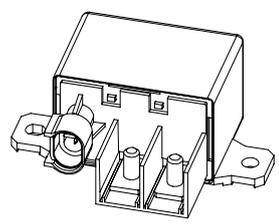

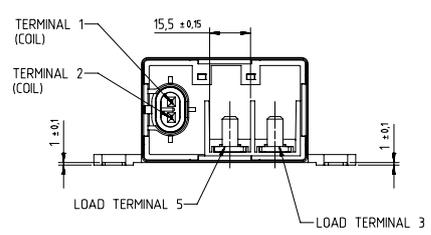
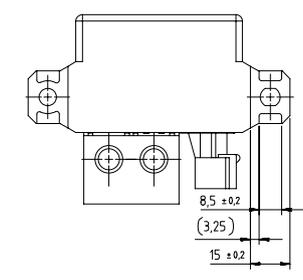
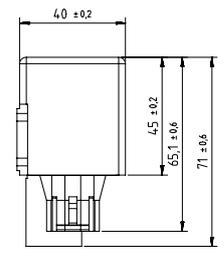


PART	MATERIAL
COVER	PA 66 GF 25
BASE	PA 66 GF 25
COIL TERMINAL 1	CuSn
COIL TERMINAL 2	CuSn
LOAD TERMINAL 3	ECu
LOAD TERMINAL 5	ECu
CONTACTS	AgSnO ₂

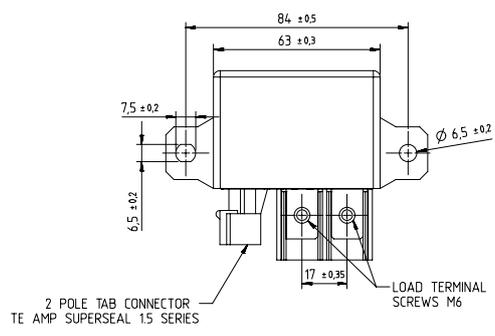

TE PIN	REV.	TE PART NAME
1-1393315-1	B	V23132-B2002-B200

PROPRIETARY THE REPRODUCTION, TRANSMISSION OR USE OF THIS DOCUMENT OR ITS CONTENTS IS NOT PERMITTED WITHOUT EXPRESS WRITTEN PERMISSION. OFFENSES WILL BE LITIGATED FOR ALL JURISDICTIONS. ALL RIGHTS, INCLUDING RIGHTS CREATED BY REGISTERED PATENTS GRANTED FOR A UTILITY, MODEL OR DESIGN, ARE RESERVED.		CHANGES TO THIS DRAWING MUST BE DONE ONLY IN CAD	PAPER SIZE A2
APPLICABLE SPEC.:		FINISH:	
DIMENSIONS IN THIS DRAWING APPLY TO UNLESS SPECIFIED OTHERWISE		DIMENSIONS APPLY TO UNLESS SPECIFIED OTHERWISE	PLATING:
TOLERANCE UNLESS SPECIFIED OTHERWISE: ± 0.1 DIMENSIONS IN MM		SCALE: 1:1	WEIGHT:
DATE: 23APR2009 NAME: JFronc APPR: 10NOV2017 J.Fronc REV. LOCATION: JMR PE Evera		PART NAME: DIMENSIONAL DRAWING HCR 24V	
B ECD-17-016880 10NOV2017 FS A INITIAL VERSION 04MAR2011 JMF		DWS NO.: V23132-B2002-B200	
REV./CHANGE ORDER	DATE	APP.	SHT. 1 OF 2

Coil data	
Rated coil voltage	24 VDC
Coil resistance (unsuppressed coil)	178 Ohm
Rated coil power (unsuppressed coil)	3,3 W
Maximum coil temperature	155°C

Electrical values	
Rated voltage	24 VDC
Coil resistance (with suppression)	141 Ohm
Rated coil power (with suppression)	4,1 W
Operate voltage VDC	14,4
Release voltage VDC	2,4

Contact data	
Contact arrangement	Double Make contact 1 Form X
Rated voltage	24 VDC
Rated current, cable 25mm ²	130A at 85°C
Limiting continuous current	
23°C, load cable 16mm ²	130A
85°C, load cable 16mm ²	120A
125°C, load cable 16mm ²	60A
23°C, load cable 25mm ²	180A
85°C, load cable 25mm ²	130A
125°C, load cable 25mm ²	70A
Limiting making current, load current max. 3s on, make/break ratio 1:10	300A
Limiting breaking current	300A
Contact material	AgSnO2
Min. Recommended contact load	1A at 5VDC
Initial voltage drop, typ. at 100A	70mV
Frequency of operation, with/without load	6 ops./min.
Operate/release time typ at nominal voltage	25/8ms
Electrical endurance	
form A contact (ND), resistive load, cyclic temperature: +23°C	>5x10 ⁴ cycles at 200A, 27VDC
Mechanical endurance	>10 ⁷ operations

Other Data	
EU RoHS/ELV compliance	complaint
Ambient temperature	-40 to +125°C
Dry heat, IEC 60068-2-2	500h at 100°C
Damp heat constant, IEC 60068-2-3 (78), Ca	500h, 40°C, 93% RH
Degree of protection	
dustproof	IP54 (IEC 60529), RT I (IEC 61810)
sealed:	sealing in accordance with IEC 68
immersion cleanable	IP67 (IEC 60529), RT III (IEC 61810)
Corrosive gas	
IEC 60068-2-42	10 days
IEC 60068-2-43	10 days
Vibration resistance (functional)	
IEC 60068-2-6 (sine sweep)	10 to 200 Hz >5g ³
Shock resistance (functional)	
IEC 60068-2-27 (half sine)	6ms >20g ³
Drop test, free fall	
IEC 60068-2-32	1m onto concrete

¹ No change in the switching state > 10 micro s.

Mechanical data	
Cover retention	
Pull force	500 N
Push force	500 N
Terminal retention	
Pull force	150 N
Push force	150 N
Resistance to bending	20 N
Force applied to side	20 N
Torsion	5 Nm

TE PIN		REV.	TE PART NAME
1-1393315-1		B	V23132-B2002-B200
<small>PROPRIETARY</small> <small>THE REPRODUCTION, TRANSMISSION OR USE OF THIS DOCUMENT OR ITS CONTENTS IS NOT PERMITTED WITHOUT EXPRESS WRITTEN PERMISSION. OFFENSES WILL BE SUED FOR ALL DAMAGES. ALL RIGHTS, INCLUDING RIGHTS GRANTED BY REGISTERED PATENTS GRANTED FOR A UTILITY MODEL OR DESIGN, ARE RESERVED.</small>			<small>CHANGES TO THIS DRAWING MUST BE DONE ONLY IN CAD</small>
<small>APPLICABLE SPEC:</small>			<small>FINISH</small> <small>DIMENSIONS APPLY</small> <small>PLATING</small> <small>SCALE</small> <small>1:1</small> <small>WEIGHT</small> <small>MATERIAL</small>
<small>TOLERANCE UNLESS SPECIFIED OTHERWISE</small> <small>± 0,1</small> <small>DIMENSIONS IN MM</small>		<small>DATE</small> <small>NAME</small> <small>PART NAME</small> <small>OWN: 23APR2009</small> <small>IFranc</small> <small>DIMENSIONAL DRAWING</small> <small>APP: 18Nov2017</small> <small>A.Fern</small> <small>HCR 24V</small> <small>REV.1</small> <small>LOCATION</small> <small>MR PE Evera</small> <small>REV. CHANGE ORDER</small> <small>DATE</small> <small>APP.</small> <small>B ECD-17-016880</small> <small>10Nov2017</small> <small>FS</small> <small>A INITIAL VERSION</small> <small>04MAR2011</small> <small>HMF</small>	
			<small>DWG NO.</small> V23132-B2002-B200
			<small>SHT.</small> 2 <small>OF 2</small>