


# M 1142007

# SCHEDA TECNICA

Materiale:  
POLIAMMIDE PA6 o PA6,6  
autoestinguenta cl. V2 (UL 94)  
Temperatura d'impiego:  
da -20°C a +90°C (continua)  
Colore: grigio RAL 7035,  
nero RAL 9005 o grigio scuro  
RAL 7001

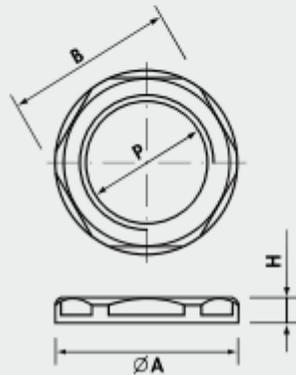

| P    | $\varnothing A$<br>(mm) | B<br>Chiave<br>(mm) | H<br>(mm) | Imballo<br>standard/minimo |
|------|-------------------------|---------------------|-----------|----------------------------|
| Pg 7 | 21                      | 19                  | 5         | 100                        |



# FASCETTE IN PA6

# SCHEMA TECNICA

| Dimensioni* | Ø Serraggio max | Tenuta |       | Conf.  |
|-------------|-----------------|--------|-------|--------|
| (mm)        | (mm)            | (kg)   | (N)   | pz.    |
| 2,2x75      | 15              | 6,12   | 60    | 100    |
| 2,2x75      | 15              | 6,12   | 60    | 1.000  |
| 2,5x98      | 21              | 8,16   | 80    | 100    |
| 2,5x98      | 21              | 8,16   | 80    | 1.000  |
| 2,5x98      | 21              | 8,16   | 80    | 20.000 |
| 2,5x135     | 32              | 8,16   | 80    | 100    |
| 2,5x135     | 32              | 8,16   | 80    | 1.000  |
| 2,6x160     | 40              | 8,16   | 80    | 100    |
| 2,6x160     | 40              | 8,16   | 80    | 1.000  |
| 2,6x200     | 52              | 8,16   | 80    | 100    |
| 2,6x200     | 52              | 8,16   | 80    | 1.000  |
| 3,5x140     | 32              | 18,36  | 180   | 100    |
| 3,5x140     | 32              | 18,36  | 180   | 1.000  |
| 3,5x200     | 50              | 18,36  | 180   | 100    |
| 3,5x200     | 50              | 18,36  | 180   | 1.000  |
| 3,5x290     | 80              | 18,36  | 180   | 100    |
| 3,5x290     | 80              | 18,36  | 180   | 500    |
| 3,5x370     | 103             | 18,36  | 180   | 100    |
| 4,5x120     | 24              | 22,44  | 220   | 100    |
| 4,5x120     | 24              | 22,44  | 220   | 1.000  |
| 4,5x160     | 40              | 22,44  | 220   | 100    |
| 4,5x160     | 40              | 22,44  | 220   | 1.000  |
| 4,8x178     | 45              | 22,44  | 220   | 100    |
| 4,8x178     | 45              | 22,44  | 220   | 1.000  |
| 4,5x200     | 50              | 22,44  | 220   | 100    |
| 4,8x200     | 50              | 22,44  | 220   | 1.000  |
| 4,8x250     | 68              | 22,44  | 220   | 100    |
| 4,5x290     | 78              | 22,44  | 220   | 100    |
| 4,5x360     | 100             | 22,44  | 220   | 100    |
| 4,8x390     | 106             | 22,44  | 220   | 100    |
| 4,5x430     | 115             | 22,44  | 220   | 100    |
| 7,8x180     | 45              | 55,08  | 540   | 100    |
| 7,8x240     | 63              | 55,08  | 540   | 100    |
| 7,8x300     | 80              | 55,08  | 540   | 100    |
| 7,5x365     | 100             | 55,08  | 540   | 100    |
| 7,5x450     | 130             | 55,08  | 540   | 100    |
| 7,5x540     | 158             | 55,08  | 540   | 100    |
| 7,5x750     | 220             | 55,08  | 540   | 100    |
| 9,0x780     | 233             | 71,4   | 700   | 100    |
| 12,5x225    | 57              | 110    | 1.080 | 50     |
| 12,5x500    | 143             | 110    | 1.080 | 50     |
| 12,5x720    | 213             | 110    | 1.080 | 50     |
| 12,5x850    | 255             | 110    | 1.080 | 50     |
| 12,5x1.000  | 302             | 110    | 1.080 | 50     |

