

## PORTA RELE' DI POTENZA DA C/S


### DATA SHEET

### Power-Relay-Socket


for PCB  
2 x 9,5 mm + 2 x 6,3 mm

#### 1. Technical data

Rated voltage: 42 V  
 Operating temperature: - 40 to 85 °C (- 40 to 185 °F)  
 Material: PA66 V0 UL94  
 Color: black  
 Weight: approx. 12 g  
 Contact arrangement: 2 x Maxi-Federkontakt 9,5 mm, X7-1168-0803  
 2 x Standard-Power-Timer-Kontakt 6,3 mm, X7-1118-0100  
 Contact base material: CuNiSi, surface tin-plated  
 Power Contact base material: CuSn6, surface BROXALLOY

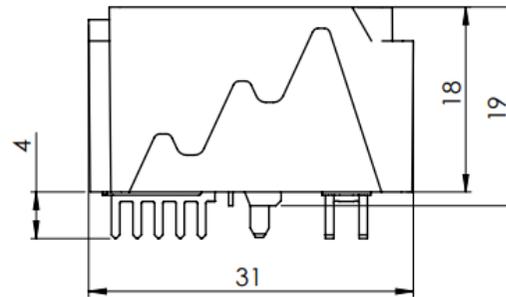

#### Layout

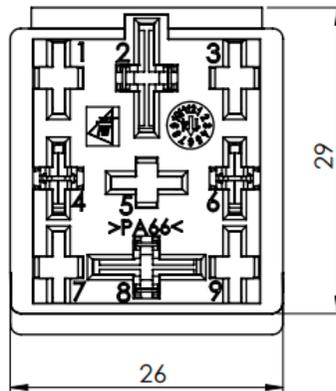

Sperrfläche ca. 3 x 1,5 [mm]  
 restricted area approx. 3 x 1.5 [mm]

