

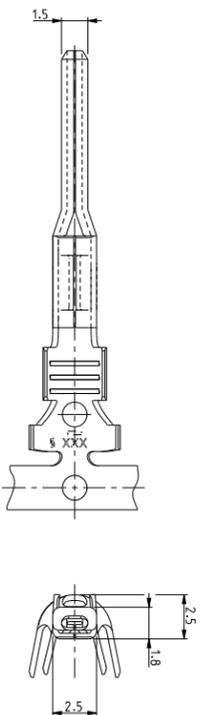




THIS DRAWING IS UNPUBLISHED.
© COPYRIGHT COMPANY BY - RELEASED FOR FABRICATION. ALL RIGHTS RESERVED.

REVISIONS			
P	LTB	DESCRIPTION	DATE
A2		REDRAWN TO CREO	19/09/2017
			JH JP

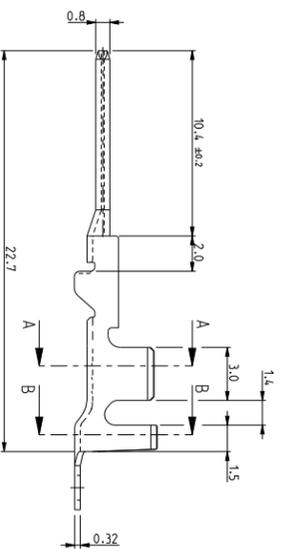


- DELIVERY STATE: WRAPPED UP ROLL WITH STEP BETWEEN TERMINALS = 11,9±0,2mm STATO DI FORNITURA: AVVOLTI SU BOBINA CON PASSO TRA TERMINALI DI = 11,9±0,2mm
- SUITABLE FOR SINGLE WIRE SEAL ADDITTO PER GOMMINO TE 281934
- MAX. CURRENT CAPACITY: 14A

CUSTOMER DRAWING FOR INFORMATION ONLY
DISSEGNO PER CLIENTE SOLO PER RIFERIMENTO

THIS DRAWING IS A CONTROLLED DOCUMENT.
PRE-TIN (PRE-STAGNATO)
FINISH/COLOR (OTTONE)
MATERIAL (MATERIALE)
PART NUMBER 282465-1

STE TE Connectivity

MINI MIC RS TAB CONTACT

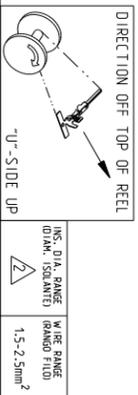

INS. DIA. RANGE (DIAM. ISOLANTE)	WIRE RANGE (RANGO FILA)	1.5-2.5mm ²
DIMENSIONS: MIN		
ORIENTATION	ORIENTAMENTO	1 2 3 4 5 6 7 8 9 10 11 12
±0.3		
FINISH		
CUSTOMER DRAWING		

SIZE CAD CODE DRAWING NO
A3 - 282465

RESTRICTED TO
SCALE 5:1 SHEET 1 OF 1 REV A2