

M 22154

SCHEDA TECNICA


The MDK systems are designed for single-way and multi-way connectors with straight terminals. It is used in the automotive industry, domestic appliance industry and in industrial electronics.

Characteristics

- low insertion and withdrawal forces
- high terminal density
- high contact stability at high ambient temperatures
- increased current rating resulting from stainless steel spring

Use

- for connection to components
- as a solder connection
- for splash-proof applications with seals for single wires and housings or with fluid pining compound

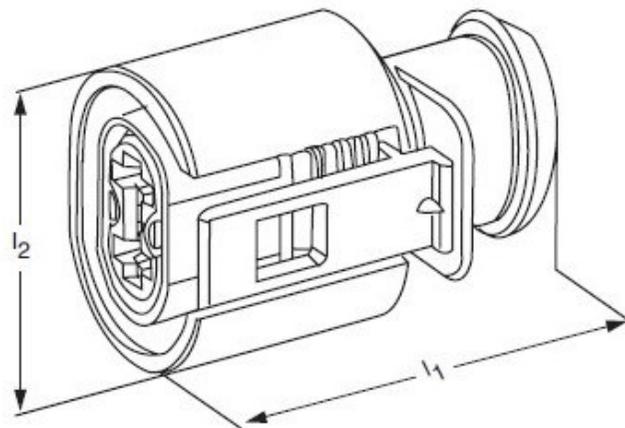

No. of ways	11	12
-------------	----	----

Specification	Material	Colour
---------------	----------	--------

2	34.00	23.10
---	-------	-------

MDK 3 PLS - Gehäuse		
Gehäuse	PBT	tiefschwarz
Sicherungsring	PA +PE	tiefschwarz
Dichtung	MQ	korallenrot

