




$\varnothing 24.00 \pm .50$
[609.60 ± 12.70]

$\varnothing 1.188 \pm .250$
[30.18 ± 6.35]

CONTACT ORIENTATION ON REEL FOR AUTO CRIMP MACHINE



REV	SYM	DESCRIPTION	DATE	APPROVED
H	1060-16-01**			
E		REDESIGNED/REDRAWN PER E.O. P16391	11-05-99	R.D.R.
F		REVISED PER E.O. P16998	12-08-00	R.D.R.
G		REVISED PER E.O. P19555	7-11-07	R.D.R.
H		REVISED PER E.O. P20396	6-25-08	R.D.R.

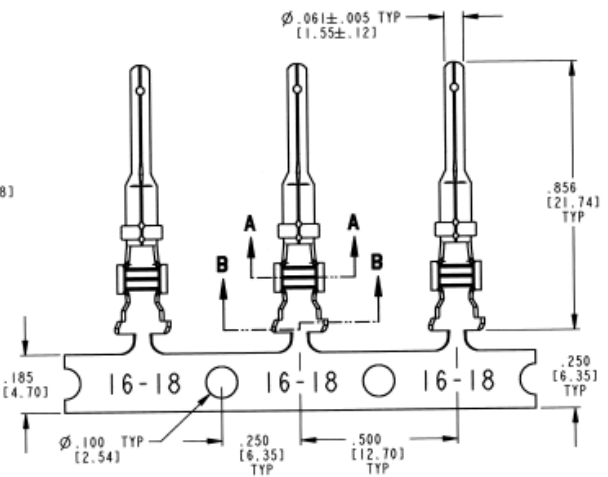

7. MATERIAL: COPPER ALLOY.
 6. WHEN ** = 22 PLATING IS NICKEL.
 ** = 44 PLATING IS GOLD.
 ** = 77 PLATING IS TIN.
 5. SEE 0425-015-0000 FOR CONTACT PERFORMANCE AND WIRE APPLICATION CHARACTERISTICS.
 4. THIS CONTACT MAY BE CRIMPED WITH DCT16-02-00 AUTOMATIC DIE, DTT-16-00 OR DTT-16-01 HAND TOOLS. SEE DRAWING 0425-203-0000 FOR APPLICABLE WIRE SIZE, INSULATION DIAMETER RANGE, AND CRIMPING INFORMATION.
 3. ONE REEL CONTAINS APPROXIMATELY 4000 CONTACTS.
 2. DIMENSIONAL TOLERANCE: $\pm .025$ [0.63].
 1. DIMENSIONS ARE IN INCHES [mm].
- NOTES: UNLESS OTHERWISE SPECIFIED

SIGNATURE & DATE	
DR	J. APOSTOL 03DEC2009
CHK	D. M. M. 06/25/10
FE	D. M. M. 06/25/10
APPD	R. M. 6/25/10
SCALE	NONE

STAMPED CONTACT
PIN
SIZE 16

ENVELOPE

EP	MILL. CODE
	3850 INDUSTRIAL AVE. HEMET, CA 92545
B	1060-16-01**
CODE 11229	SHEET 1 OF 1

