


M 480699

SCHEDA TECNICA

REVISIONS	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>REV.</th> <th>DESCRIPTION</th> <th>DATE</th> <th>BY</th> </tr> <tr> <td>CM 53</td> <td>REVISED PER EDS-11-024857</td> <td>11/04/11</td> <td>DK</td> </tr> </table>	REV.	DESCRIPTION	DATE	BY	CM 53	REVISED PER EDS-11-024857	11/04/11	DK
REV.	DESCRIPTION	DATE	BY						
CM 53	REVISED PER EDS-11-024857	11/04/11	DK						

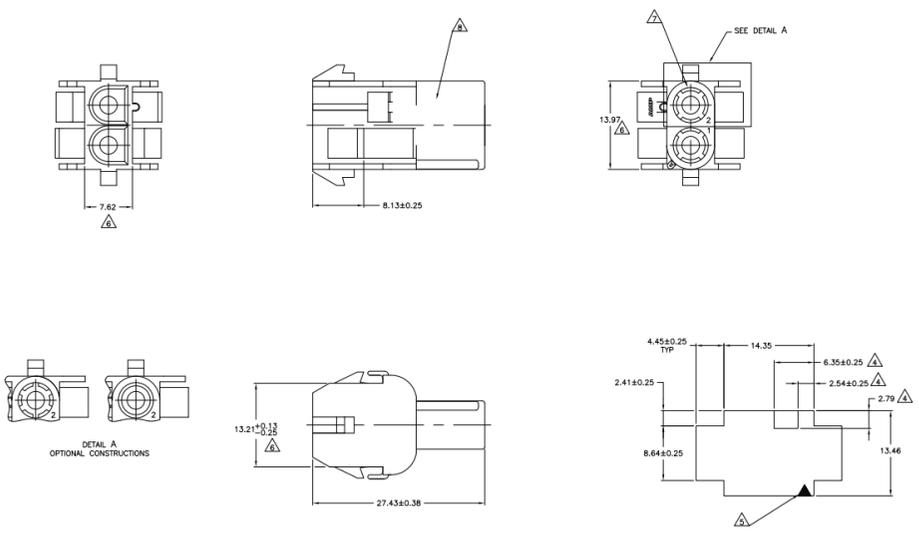

DETAIL A
OPTIONAL CONSTRUCTIONS

3-DIMENSIONAL MODEL
NTS

RECOMMENDED PANEL CUTOUT

1. MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK® PLUG.
2. RECOMMENDED PANEL THICKNESS 0.76 - 2.29.
3. PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.

▲ OPTIONAL FOR KEYING HOUSING IN PANEL.

▲ CIRCUIT NUMBER 1 LOCATION.

▲ DIMENSION INDICATED IS AS MOLDED. ADDITIONAL GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR.

▲ FOUR RIBS EQUALLY SPACED. NO SPECIFIC ORIENTATION. NO RIBS OR SIX RIBS EQUALLY SPACED. NO SPECIFIC ORIENTATION. OPTIONAL.

▲ UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.

▲ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINIS

CONVERSION TABLE	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>4.45</td><td>.175</td><td>27.43</td><td>1.080</td> </tr> <tr> <td>2.79</td><td>.110</td><td>14.35</td><td>.565</td> </tr> <tr> <td>2.54</td><td>.100</td><td>13.97</td><td>.550</td> </tr> <tr> <td>2.41</td><td>.095</td><td>13.46</td><td>.530</td> </tr> <tr> <td>2.29</td><td>.090</td><td>13.21</td><td>.520</td> </tr> <tr> <td>0.76</td><td>.030</td><td>8.64</td><td>.340</td> </tr> <tr> <td>0.58</td><td>.015</td><td>8.13</td><td>.320</td> </tr> <tr> <td>0.25</td><td>.010</td><td>7.62</td><td>.300</td> </tr> <tr> <td>0.13</td><td>.005</td><td>6.35</td><td>.250</td> </tr> <tr> <td>MM</td><td>IN</td><td>MM</td><td>IN</td> </tr> </table>	4.45	.175	27.43	1.080	2.79	.110	14.35	.565	2.54	.100	13.97	.550	2.41	.095	13.46	.530	2.29	.090	13.21	.520	0.76	.030	8.64	.340	0.58	.015	8.13	.320	0.25	.010	7.62	.300	0.13	.005	6.35	.250	MM	IN	MM	IN
4.45	.175	27.43	1.080																																						
2.79	.110	14.35	.565																																						
2.54	.100	13.97	.550																																						
2.41	.095	13.46	.530																																						
2.29	.090	13.21	.520																																						
0.76	.030	8.64	.340																																						
0.58	.015	8.13	.320																																						
0.25	.010	7.62	.300																																						
0.13	.005	6.35	.250																																						
MM	IN	MM	IN																																						

THIS DRAWING IS A CONTROLLED DOCUMENT	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>DESIGNED BY</td> <td>REVIEWED BY</td> <td>DATE</td> <td>REV.</td> </tr> <tr> <td>DRAWN BY</td> <td>APPROVED BY</td> <td>DATE</td> <td>REV.</td> </tr> <tr> <td>CHECKED BY</td> <td>DATE</td> <td>REV.</td> <td></td> </tr> <tr> <td>ISSUED BY</td> <td>DATE</td> <td>REV.</td> <td></td> </tr> </table>	DESIGNED BY	REVIEWED BY	DATE	REV.	DRAWN BY	APPROVED BY	DATE	REV.	CHECKED BY	DATE	REV.		ISSUED BY	DATE	REV.	
DESIGNED BY	REVIEWED BY	DATE	REV.														
DRAWN BY	APPROVED BY	DATE	REV.														
CHECKED BY	DATE	REV.															
ISSUED BY	DATE	REV.															

METRIC	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>THIS DRAWING IS A CONTROLLED DOCUMENT</td> <td>TE Connectivity</td> </tr> <tr> <td>REVISIONS</td> <td>CM 2 CIRCUIT</td> </tr> <tr> <td>UNIVERSAL MATE-N-LOK (TM)</td> <td></td> </tr> <tr> <td>DATE</td> <td>REV.</td> </tr> <tr> <td>00779</td> <td>480699</td> </tr> <tr> <td>CUSTOMER DRAWING</td> <td></td> </tr> </table>	THIS DRAWING IS A CONTROLLED DOCUMENT	TE Connectivity	REVISIONS	CM 2 CIRCUIT	UNIVERSAL MATE-N-LOK (TM)		DATE	REV.	00779	480699	CUSTOMER DRAWING	
THIS DRAWING IS A CONTROLLED DOCUMENT	TE Connectivity												
REVISIONS	CM 2 CIRCUIT												
UNIVERSAL MATE-N-LOK (TM)													
DATE	REV.												
00779	480699												
CUSTOMER DRAWING													

▲ SUPERSEDED BY 1-480699-0	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>BLACK</td> <td>1-480699-9</td> </tr> <tr> <td>GREY</td> <td>1-480699-8</td> </tr> <tr> <td>BLUE</td> <td>1-480699-6</td> </tr> <tr> <td>GREEN</td> <td>1-480699-5</td> </tr> <tr> <td>YELLOW</td> <td>1-480699-4</td> </tr> <tr> <td>ORANGE</td> <td>1-480699-3</td> </tr> <tr> <td>RED</td> <td>1-480699-2</td> </tr> <tr> <td>BROWN</td> <td>1-480699-1</td> </tr> <tr> <td>NATURAL</td> <td>1-480699-0</td> </tr> <tr> <td>COLOR</td> <td>PART NO.</td> </tr> </table>	BLACK	1-480699-9	GREY	1-480699-8	BLUE	1-480699-6	GREEN	1-480699-5	YELLOW	1-480699-4	ORANGE	1-480699-3	RED	1-480699-2	BROWN	1-480699-1	NATURAL	1-480699-0	COLOR	PART NO.
BLACK	1-480699-9																				
GREY	1-480699-8																				
BLUE	1-480699-6																				
GREEN	1-480699-5																				
YELLOW	1-480699-4																				
ORANGE	1-480699-3																				
RED	1-480699-2																				
BROWN	1-480699-1																				
NATURAL	1-480699-0																				
COLOR	PART NO.																				

