
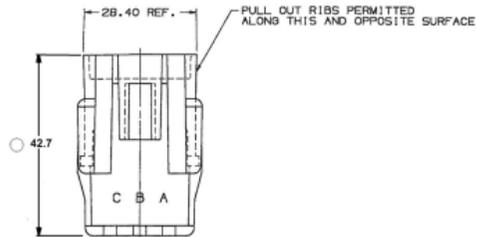
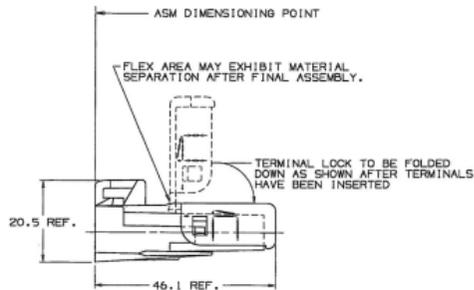



REV.	DESCRIPTION	DATE	BY	CHKD.
1	INITIAL RELEASE			
2	REVISION			
3	REVISION			
4	REVISION			
5	REVISION			



- NOTE:
1. USE TERMINAL LOCKS OR EQUIVALENT.
 2. USE THE CONNECTOR IS LOCKED OR EQUIVALENT.
 3. USE LOCKWASHERS OR EQUIVALENT.
 4. SEALING CODE 1.
 5. USE PROTECTED CABLE SEAL OR EQUIVALENT.
 6. CAUTION: DO NOT ATTEMPT TO OPEN THIS SWITCH WHEN OPERATING & NOT THE PART TO A WEATHER PROOF CONNECTOR. DAMAGE CAUSED BY EXCESSIVE FORCE WILL BE THE USER'S RESPONSIBILITY.
 7. CABLES (1) BARED DRIVING COMPASS WIRING TO BE LOCATED ON AN EXTERIOR SURFACE. REFER TO THE FINAL ASSEMBLY OFFICIAL CONNECTION TO BE "PREF" OR HOLD.
 8. BATTERY WIRING (2) BARED DRIVING COMPASS WIRING TO BE LOCATED ON AN EXTERIOR SURFACE. REFER TO THE FINAL ASSEMBLY OFFICIAL CONNECTION TO BE "PREF" OR HOLD.

REV.	DESCRIPTION	DATE	BY	CHKD.
1	INITIAL RELEASE			
2	REVISION			
3	REVISION			
4	REVISION			
5	REVISION			

DELPHI
MULTI-PURPOSE ELECTRICAL SYSTEMS

DATE: 12/03/2015

REV: 1

12034357

