

M 7807272






SCHEDA TECNICA

Einlegereduzierungen Reducers schwarz black



Material:
Polyamid 66
Obere Gebrauchstemperatur:
240 h/150°C

Material:
Polyamide 66
Maximum Temperature:
240 h/150°C

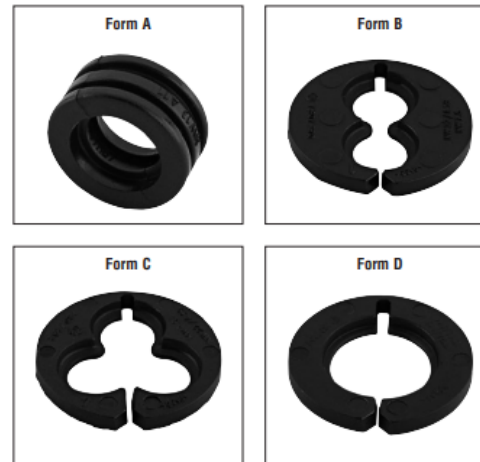

Form	für NW Normalprofil	für NW AHW	b mm	l mm	Art.-Nr.	VE Stck.
Form	for NW normal profile	for NW AHW	b mm	l mm	Art. no.	PU pcs.
A	8,5 - 4,5		11,7	9,0	7807270	2000
A	10 - 4,5	8,5 - 4,5	12,7	9,0	7807272	2000
A	10 - 7,5	8,5 - 6	17,1	7,5	7807276	2000
A	13 - 10	11 - 8,5	16,0	7,5	7807280	2000
A	13 - 7,5	11 - 6	16,0	7,5	7807278	500
A	17 - 13	15 - 11	21,3	8,5	7807283	500
A	22 - 17	19 - 15	25,8	9,5	7807282	2000
A *)	17 - Ø9	15 - Ø9	21,5	8,0	7807605	*)
A	17 - Ø12	15 - Ø 12	21,5	8,0	7807330	100
B	17 - 2 x 9,5	15 - 2 x 4,5	21,3	2,5	7807289	500
B	22 - 2 x 7,5	19 - 2 x 6	25,0	2,6	7807290	1000
B	22 - 8,5 - 7,5		25,0	2,6	7807291	1000
B	22 - 2 x 4,5	19 - 2 x 4,5	25,9	2,6	7807187	1000
B	22 - 7,5 - 4,5	19 - 6 - 4,5	25,9	2,6	7807765	a. Arfr./on request
C	17 - 3 x 4,5	15 - 3 x 4,5	21,3	2,5	7807293	500
C	22 - 2 x 4,5 - 7,5	19 - 2 x 4,5 - 6	25,9	2,6	7807697	a. Arfr./on request
C	22 - 2 x 7,5 - 4,5	19 - 2 x 6 - 4,5	25,9	2,6	7807761	a. Arfr./on request
C	22 - 3 x 4,5	19 - 3 x 4,5	25,9	2,6	7807698	a. Arfr./on request
C	22 - 3 x 7,5	19 - 3 x 6	25,9	2,6	7807292	1000
C	29 - 3 x 8,5		34,8	2,3	7807295	1000
D	10 - 8,5		13,1	2,1	7807288	500
D	17 - 13	15 - 11	27,4	2,5	7807296	1000
D	22 - 13	19 - 11	25,9	2,6	7807294	1000
D	26 - 22	26 - 19	31,7	2,4	7807654	500
D	10 - 4,5	8,5 - 4,5	13,2	2,1	7807299	1000
D	10 - 7,5	8,5 - 6	13,2	2,1	7807297	a. Arfr./on request
D	14 - 13	x - 11	18,6	2,0	7807766	a. Arfr./on request



mes connettori
componenti per il cablaggio