


M 9002-03 - sdoppiatore termorestringente rosso/blu con stagno 0,5-2,5 mmq

SOLDER BUTT CONNECTOR - STEP DOWN

PHOTO / TECHNICAL DRAWING

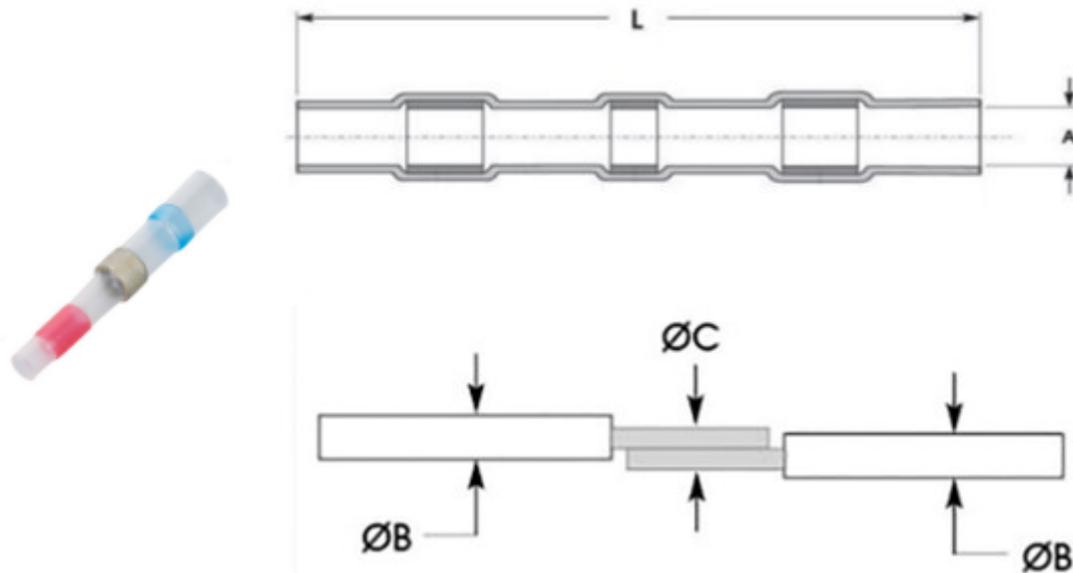

TECHNICAL SPECIFICATIONS

Insulation:

Polyolefin, heat shrinkable,
radiation cross-linked modified

Solder preform:

With flux

Operating temperature:

-55~125 °C

Min. shrink temperature:

85 °C

Volume resistivity (Ω cm):

$\geq 10^{15}$

Dielectric strength (KV/mm):

≥ 25

Voltage resistant:

> 600V

DIMENSIONS

Wire range
22-14 AWG
0,5-2,5 mm ²

Color code	L	Ø A	Ø B min	Ø B max Ø C max	Ø C min	UL
blue to red	40	4,5	1,3	4,5	1,2	

