


M 9806104

SCHEDA TECNICA



Form	außen-greifend	Schnapp-verschluss	Bügel-verschluss	Steck-fuß-einschub	Außen-einhänge-kontur an Abgang C	passend für Well Schlauch-Profil NW (A-B-C) Normal +UFW	AHW	selbst-schließend L-Profil	verschieß-bar V-Profil	b mm	l mm	Art.-Nr.	VE Stck.	
Form	outside gripping	Snap lock	Clamp lock	Plug socket slide in	exterior hook-up on branch C	suitable for corrugated tube profile NW (A-B-C) normal +UFW	AHW	self closing L-Profile	lockable V-Profile	b mm	l mm	Art. no.	PU pcs.	
B	✓	✓	✓	✓			13-13-10	11-11-8,5	13-13-10	11-11-8,5	31,6	45,3	9806104	500

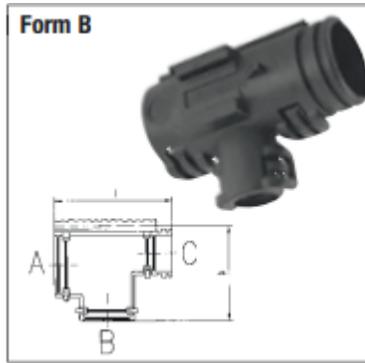

T-Verteiler

T-Manifolds

RoHS

Material:
Polyamid 66
Polyamid 46 auf Anfrage

Temperaturbereich:
-40°C bis 135°C
500 h: -40°C bis 150°C

Farbe(n)/Ausführungen:
• Schwarz

Material:
Polyamide 66
Polyamide 46 on request

Temperature range:
-40°C to 135°C
500 h: -40°C to 150°C

Colour(s)/Designs:
• Black

mes connettori
componenti per il cablaggio