


M DRC12-40PA




SCHEDA TECNICA



SEAL TYPE	CONTACT SIZE	MIN. INSUL. OD (mm)	MAX. INSUL. OD (mm)	WIRE RANGE (mm ²) REF ONLY
NORMAL	16	12,540	134	14-20 AWG [2,0-.501]
E	16	12,540 [1,346]	120 [3,048]	14-20 AWG [2,0-.501]



REV	DESCRIPTION	DATE	BY
E	REVISED PER FCN E-17-013222		

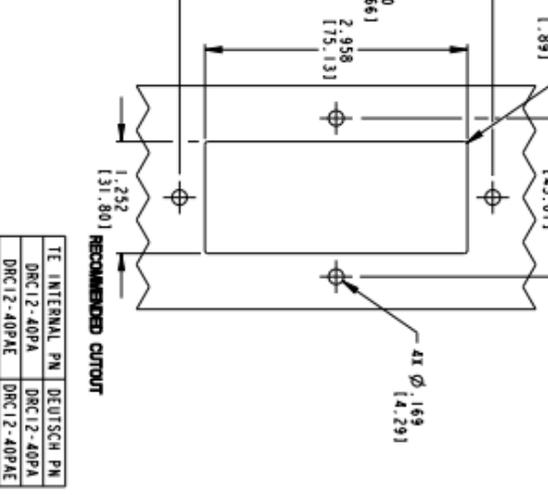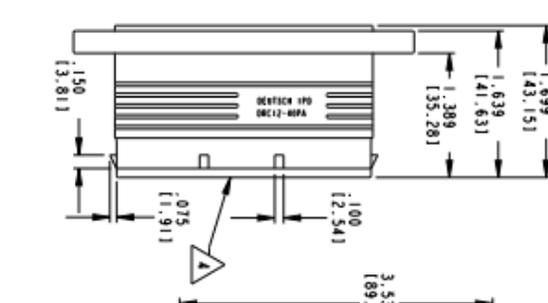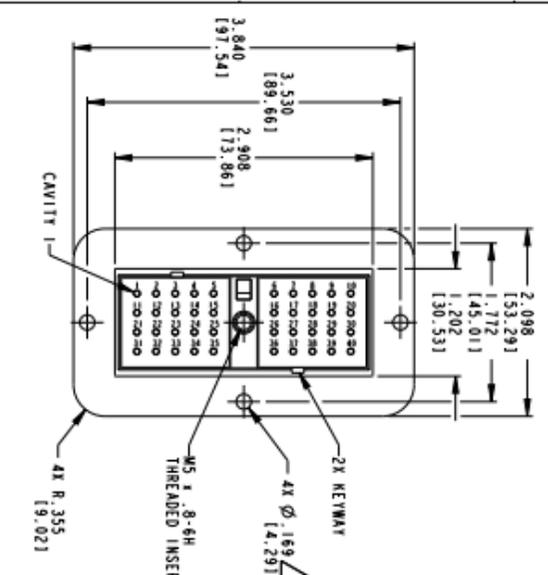

TE INTERNAL PN	DEUTSCH PN
DRC12-40PA	DRC12-40PA
DRC12-40PAE	DRC12-40PAE

NOTES:

- WHEN X = E: MARK LETTER "E" ON WELD CAP IDENTIFIES "E" WIRE SEAL.
- THIS RECEPTACLE MATES WITH DRC12-40S-XXXX: DRC12-40SA-XXXX PLUGS.
- (XXXX: ALL MODIFICATIONS) CONSULT FACTORY FOR MODS.
- FOR CONTACT AND WIRE PERFORMANCE AND APPLICATION CHARACTERISTICS, SEE DRAWING 0429-015-0000.
- RECEPTACLE IS SUPPLIED WITH DUST CAP (NOT SHOWN).

RECOMMENDED SCREW: 8-32 [M4], TORQUE: 20-25 IN-LB [2,26-2,82 Nm].

RECOMMENDED MATERIAL: HOUSING: PLASTIC; GROMMET: RUBBER; INSERT: STEEL.

RECEPTACLE, FLANGED 40 SIZE 16 DRC SERIES KEY ARRANGEMENT -A-

SCALE: 1:1

DATE: 11/11/11

REV: E