




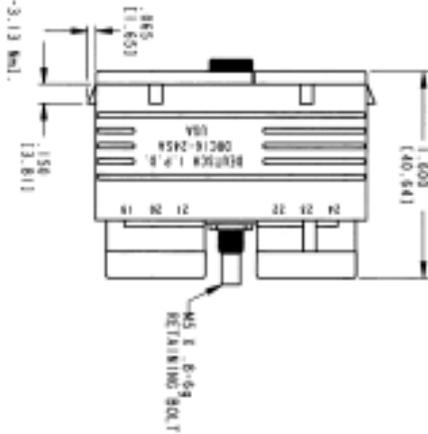

M DRC16-24SA

REV. 1		REVISIONS	
REV	NC	DESCRIPTION	DATE
		NEW RELEASE PER E.O. 211116	04/09/09
			MAN



8. MATING TORQUE REQUIREMENT: 25-28 IN-LB (2.82-3.13 Nm).
 9. SEE SHEET 2 FOR OTHER KEY ARRANGEMENTS.
 6. MATERIAL - PLUG: PLASTIC; SEAL/SPACER: RUBBER; RETAINING BOLT: STEEL.
 5. THIS PLUG MATES WITH DRC10-24P-***; DRC12-24P-***; DRC13-24P-***; AND DRC14-24P-*** RECEPTACLE. (P.A., O.C., O.ETS; ***)=SPECIAL MODIFICATIONS; CONSULT FACTORY FOR MOOS.
- FOR CONTACTS AND MATE PERFORMANCE AND APPLICATION CHARACTERISTICS, SEE ENVELOPE DRAWING 0425-015-0028.
3. PLUG SUPPLIED WITH DUST CAP. (NOT SHOWN).
 2. DIMENSION TOLERANCE: ±.025 (1.64).
 1. DIMENSIONS ARE IN INCHES (mm).
- NOTES: UNLESS OTHERWISE SPECIFIED

MIL. INSHL.	MM. INSHL.	MATE RANGE
0.3	0.3	(mm) ² REF ONLY
.188 (4.778)	.134 (3.403)	14-20 AWG
(2.341)	(3.403)	(2.0-8-503)

NO.	REVISIONS & DATE
01	BY MOTOR MANUFACT
02	BY MOTOR MANUFACT
03	BY MOTOR MANUFACT
04	BY MOTOR MANUFACT
05	BY MOTOR MANUFACT
06	BY MOTOR MANUFACT
07	BY MOTOR MANUFACT
08	BY MOTOR MANUFACT
09	BY MOTOR MANUFACT
10	BY MOTOR MANUFACT

PLUG	24 SIZE 16	KEYS: A, B, C, D	COLOUR: BLACK	DRC SERIES
ENVELOPE				
REV	B	The Deutsch Company		DRC16-24S #
DATE		14-20 AWG		ENVELOPE SHEET 1 OF 3