


M DRC16-40S

SCHEMA TECNICA



CONTACT SIZE	MIN. INSUL. OD (mm)	MAX. INSUL. OD (mm)	WIRE RANGE (mm ²) REF ONLY
16	1.100 [2.541]	1.134 [3.401]	14-18 AWG [2.0-.751]

REV.	DATE	DESCRIPTION	BY	CHK	APP
J		REVISED PER PCN E-17-012901			

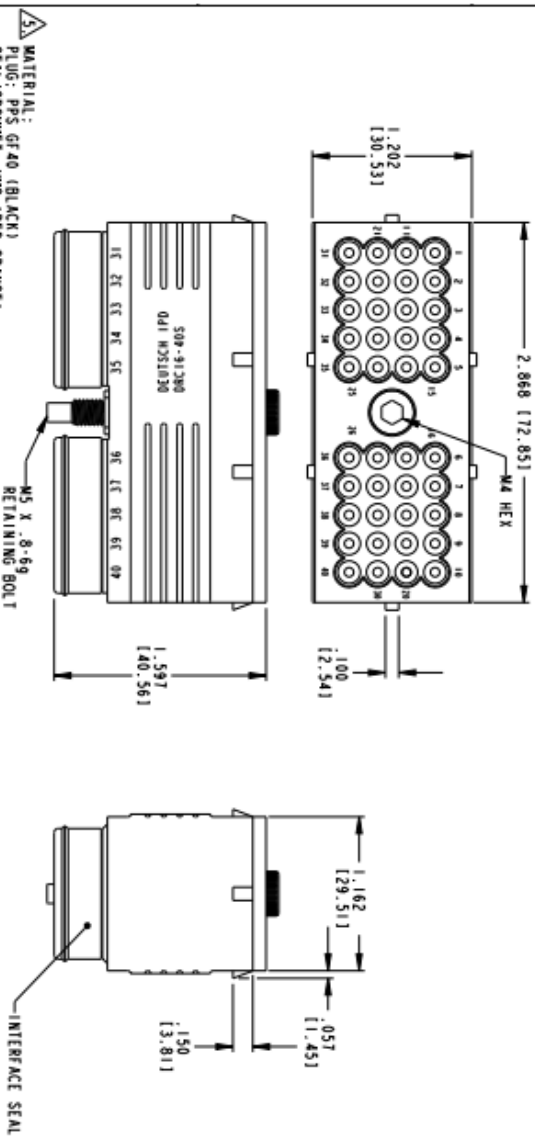

- 3. THIS PLUG MATES WITH DRC10-40P-XXXX; DRC12-40PRE-XXXX; DRC13-40PA-XXXX; DRC14-40PE-XXXX. CONSULT FACTORY FOR MODIFICATIONS. X = A, B, C, D KEYS. XXXX = MODIFICATIONS.**
- 4. MATING TORQUE REQUIREMENT: 25-28 in-lb (2.82-3.16 Nm).**
- 2. FOR CONTACTS AND WIRE PERFORMANCE AND APPLICATION CHARACTERISTICS, SEE ENVELOPE DRAWING 0425-015-0000.**
- 1. PLUG IS SUPPLIED WITH DUST CAP, 0515-001-4005 (NOT SHOWN)**

TE INTERNAL PN DRC16-40S **DEUTSCH PN** DRC16-40S

CTE TE Connectivity

DRC CONNECTOR PLUG 40 CONTACTS

SIZE 44F08 **SCALE** 1:5:1

DATE 1 of 1 **REV** J