


M DRC24-BT

SCHEDA TECNICA

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	NEW RELEASE PER ECO-14-009836	07-01-14	DM	DM
	A1	REVISED PER PCN E-18-002788	23FEB2018	JA	DM
	A2	REVISED PER PCN E-18-006789	03MAY2018	SM	DM

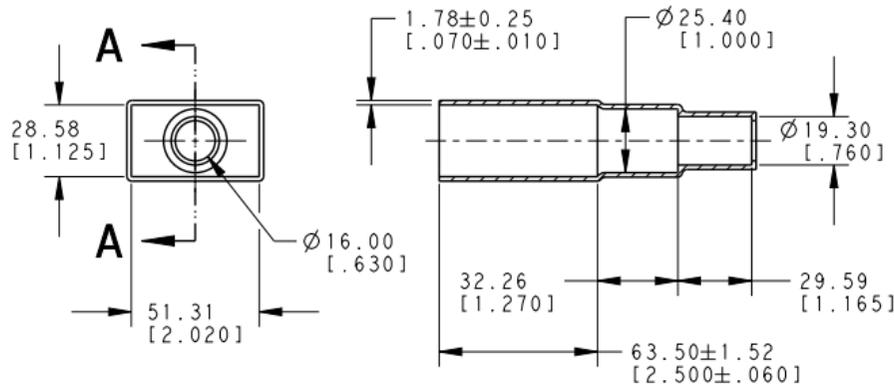

SECTION A-A

1. THIS PART IS USED ON
DRC12-24PX(E)-XXXX RECEPTACLE
DRC14-24PX(E)-XXXX RECEPTACLE
DRC16-24SX(E)-XXXX PLUG
WHERE X=A,B,C,D KEYS AND XXXX=MODIFICATION
2. TEMPERATURE RATING: -29°C TO +100°C [-20°F TO +212°F]
3. THIS ACCESSORY PART IS PROVIDED WITHOUT TYPICAL TRANSPORTATION INDUSTRY PROCESS CONTROLS. NO VALIDATION TESTING HAS BEEN PERFORMED. CUSTOMER IS RESPONSIBLE FOR DETERMINING PRODUCT PERFORMANCE AND SUITABILITY FOR APPLICATION.

NOTES:

TE INTERNAL PN	DEUTSCH PN
DRC24-BT	DRC24-BT

DIMENSIONS: mm [INCH]	DWN	01 JUL 2014	MATERIAL	PVC	FINISH	BLACK
	CHK	01 JUL 2014				
TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD	01 JUL 2014				
0 PLC ±	PRODUCT SPEC		NAME			
1 PLC ±	APPLICATION SPEC		BOOT, 24 PIN			
2 PLC ±			DRC SERIES			
3 PLC ±0.64 [0.025]	SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO	
4 PLC ±	WEIGHT		A4	44FU8	C=DRC24-BT	-
ANGLES ± 5°	CUSTOMER DRAWING		SCALE	1:2	SHEET	1 OF 1
		REV A2				

