


M DRC40-BT

SCHEDA TECNICA

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
A2		REVISED PER ECO-16-005986	22FEB2016	VNB	DM
A3		REVISED PER ECO-16-012882	31AUG2016	JA	DM
A4		REVISED PER PCN E-19-014640	11OCT2019	JA	IG
A5		REVISED PER PCN E-19-016916	30OCT2019	JA	IG

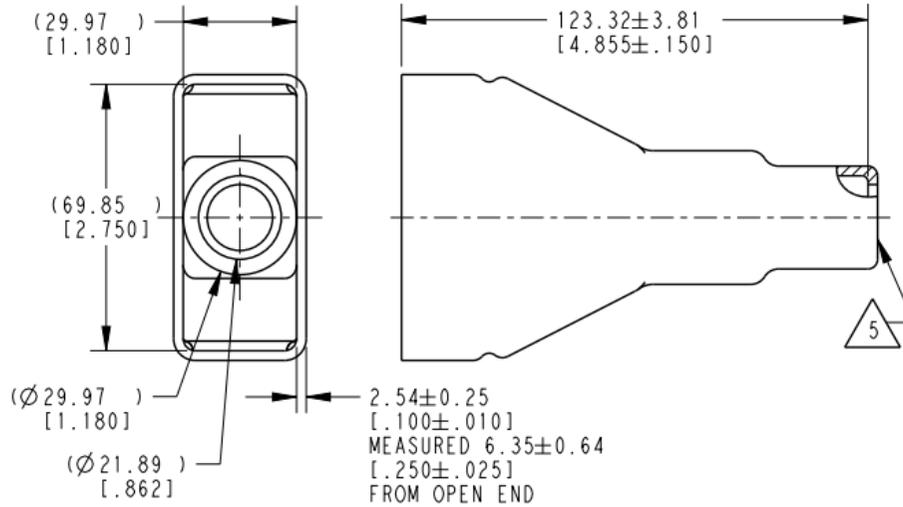

- 5 SMALL MATERIAL EXTENSION IS ACCEPTABLE ON THIS END ALL AROUND.
- THIS ACCESSORY PART IS PROVIDED WITHOUT TYPICAL TRANSPORTATION INDUSTRY PROCESS CONTROLS. NO VALIDATION TESTING HAS BEEN PERFORMED. CUSTOMER IS RESPONSIBLE FOR DETERMINING PRODUCT PERFORMANCE AND SUITABILITY FOR APPLICATION
 - BOTTOM OF PART MOLDED OPEN.
 - TEMPERATURE RATING: -29°C TO +100°C [-20°F TO +212°F]
 - THIS PART IS USED ON
DRC12-40PX(E)-XXXX RECEPTACLE
DRC14-40PX(E)-XXXX RECEPTACLE
DRC16-40SX(E)-XXXX PLUG
WHERE X=A,B,C,D KEYS AND XXXX=MODIFICATION



NOTES:

TE INTERNAL NUMBER	DEUTSCH PART NUMBER
DRC40-BT	DRC40-BT

DIMENSIONS: mm [INCH]	DWN D. MEYER	01 JUL 2014	MATERIAL	PVC	FINISH	BLACK
	CHN D. HASIBUAN	01 JUL 2014	TE TE Connectivity			
TOLERANCES UNLESS OTHERWISE SPECIFIED	APVD D. MEYER	01 JUL 2014				
0 PLC ±	PRODUCT SPEC	NAME	BOOT, 40 PIN DRC SERIES			
1 PLC ±	APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
2 PLC ±0.63 [0.025]		A 4	4AFU8	C=DRC40-BT	-	
3 PLC ±	WEIGHT	48.80g		SCALE	3:4	
4 PLC ±	CUSTOMER DRAWING			SHEET	1 OF 1	
ANGLES ±5°					REV	A5



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2019
 BY TE CONNECTIVITY ALL RIGHTS RESERVED.
 © COPYRIGHT 2014