


M DTM2P-BT

SCHEMA TECNICA

| REVISIONS | | | | |
|-----------|-----|-------------------------------|----------|-------|
| P | LTR | DESCRIPTION | DATE | APVD |
| A | | NEW RELEASE PER ECO-14-010240 | 07-07-14 | DM DM |

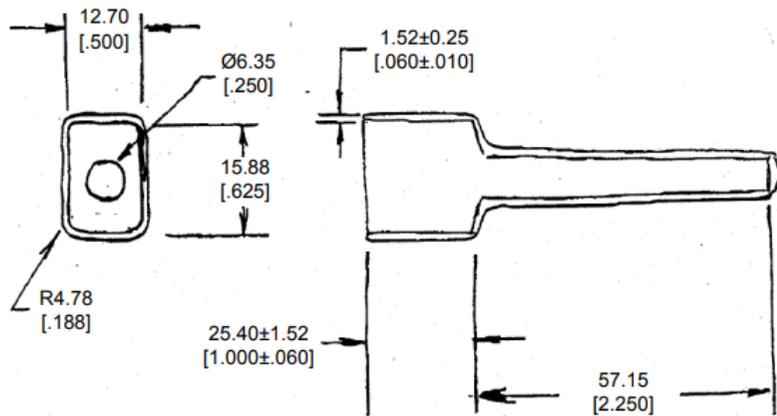

THIS DRAWING IS UNPUBLISHED. ALL RIGHTS RESERVED. COPYRIGHT 2014 BY TE CONNECTIVITY

3. PART NO. DTM2P-BT
2. TEMPERATURE RATING: -29°C TO +100°C [-20°F TO +212°F]
1. THIS PART IS USED ON DTM04-2P RECEPTACLES WITH ANY MODIFICATION THAT DOES NOT INCLUDE AN END CAP.

| | | | | | | |
|--|------------------|--|---|------------|---------------|-------|
| DIMENSIONS: MM [INCH] | DWN | D. MEYER 07JUL2014 | MATERIAL | PVC | FINISH | GRAY |
| | CHK | B. MILLIGAN 07JUL2014 |  TE Connectivity | | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | APVD | D. MEYER 07JUL2014 | | | | |
| 0 PLC ± | PRODUCT SPEC | NAME BOOT, RECEPTACLE, 2PIN DTM SERIES | | | | |
| 1 PLC ± | APPLICATION SPEC | SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO | |
| 2 PLC ± 0.63 [025] | | A 4 | 4AFU8 | C=DTM2P-BT | - | |
| 3 PLC ± | WEIGHT | 7.00 g | | | | |
| 4 PLC ± | Customer Drawing | SCALE | NONE | SHEET | 1 OF 1 | REV A |
| ANGLES ± 5° | | | | | | |

