



M DTM2S-BT

SCHEDA TECNICA

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
A		NEW RELEASE PER ECO-14-010240	07-07-14	DM	DM
A1		REVISED PER PCN-20-003720	10MAR2020	AP	IG



3D VIEW

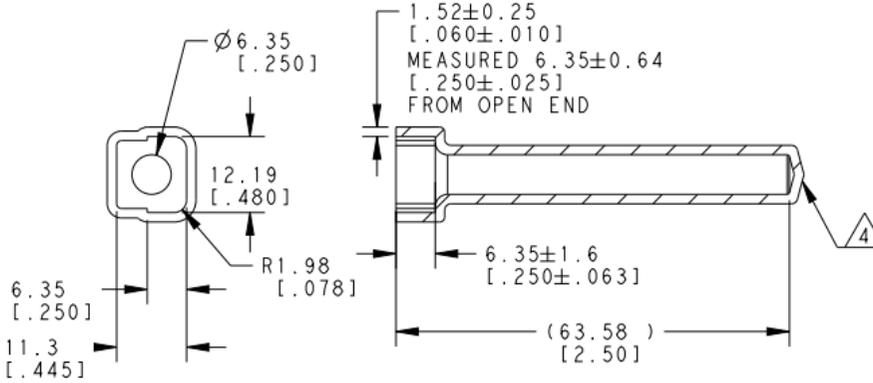

5. SMALL NON-FILLS ARE ACCEPTABLE INSIDE OF PART, INCLUDING SUPPLIER MARKING.

4. SMALL MATERIAL EXTENSION IS ACCEPTABLE ON THIS END ALL AROUND. WALL THICKNESS ON THIS END MAY VARY.

3. THIS ACCESSORY PART IS PROVIDED WITHOUT TYPICAL TRANSPORTATION INDUSTRY PROCESS CONTROLS. NO VALIDATION TESTING HAS BEEN PERFORMED. CUSTOMER IS RESPONSIBLE FOR DETERMINING PRODUCT PERFORMANCE AND SUITABILITY FOR APPLICATION.

2. TEMPERATURE RATING: -29°C TO +100°C [-20°F TO +212°F]

1. THIS PART IS USED ON DTM06-2S PLUG WITH ANY MODIFICATION THAT DOES NOT INCLUDE AN END CAP.

TE INTERNAL PN	DEUTSCH PN
DTM2S-BT	DTM2S-BT

DIMENSIONS:	DWN	07 JUL 2014	MATERIAL	PVC	FINISH	GRAY
MM [INCHES]	D. MEYER					
TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK	07 JUL 2014	 TE Connectivity	NAME	BOOT, PLUG, 2PIN	DTM SERIES
	APVD	07 JUL 2014				
0 PLC ±	D. MEYER		PRODUCT SPEC			
1 PLC ±			APPLICATION SPEC			
2 PLC ±0.63 [.025]				SIZE	CAGE CODE	DRAWING NO
3 PLC ±				A 4	4AFU8	C-DTM2S-BT
4 PLC ±				RESTRICTED TO		
ANGLES ±5°			WEIGHT	4.00 g		
			CUSTOMER DRAWING	SCALE	5:4	SHEET 1 OF 1
						REV A1

