



M DTM3P-BT

SCHEDA TECNICA

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
A		NEW RELEASE PER ECO-14-010241	07-07-14	DM	DM
A1		REVISED PER PCN E -20-004148	18MAR2020	AP	IG



3D VIEW

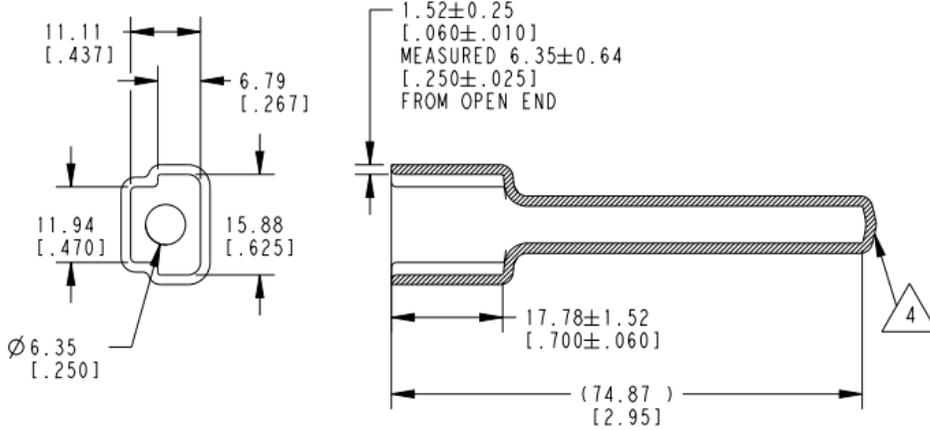

11.11 [.437] 6.79 [.267]

11.94 [.470] 15.88 [.625]

Ø 6.35 [.250]

1.52±0.25
[.060±.010]
MEASURED 6.35±0.64
[.250±.025]
FROM OPEN END

17.78±1.52
[.700±.060]

(74.87)
[2.95]

4

5. SMALL NON-FILLS ARE ACCEPTABLE INSIDE OF PART, INCLUDING SUPPLIER MARKING.

4. SMALL MATERIAL EXTENSION IS ACCEPTABLE ON THIS END ALL AROUND. WALL THICKNESS ON THIS END MAY VARY.

3. THIS ACCESSORY PART IS PROVIDED WITHOUT TYPICAL TRANSPORTATION INDUSTRY PROCESS CONTROLS. NO VALIDATION TESTING HAS BEEN PERFORMED. CUSTOMER IS RESPONSIBLE FOR DETERMINING PRODUCT PERFORMANCE AND SUITABILITY FOR APPLICATION.

2. TEMPERATURE RATING: -29°C TO +100°C [-20°F TO +212°F]

1. THIS PART IS USED ON DTM04-3P RECEPTACLES WITH ANY MODIFICATION THAT DOES NOT INCLUDE AN END CAP.

© 2020 TE Connectivity. All Rights Reserved.

NOTES:

	TE INTERNAL PN	DEUTSCH PN
	DTM3P-BT	DTM3P-BT

DIMENSIONS:	DWN	07JUL2014	MATERIAL	PVC	FINISH	GRAY	
MM [INCH]	D. MEYER						
TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK	07JUL2014	TE TE Connectivity				
	B. MILLIGAN						
	APVD	07JUL2014	NAME BOOT, RECEPTACLE, 3PIN DTM SERIES				
	D. MEYER						
0 PLC ±	PRODUCT SPEC		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
1 PLC ±			A 4	00779	C=DTM3P-BT	-	
2 PLC ±			WEIGHT	5.00 g		SCALE	5:4
3 PLC ±0.63 [.025]			CUSTOMER DRAWING	SHEET	1 OF 1	REV	A1
4 PLC ±							
ANGLES ±5°							

