
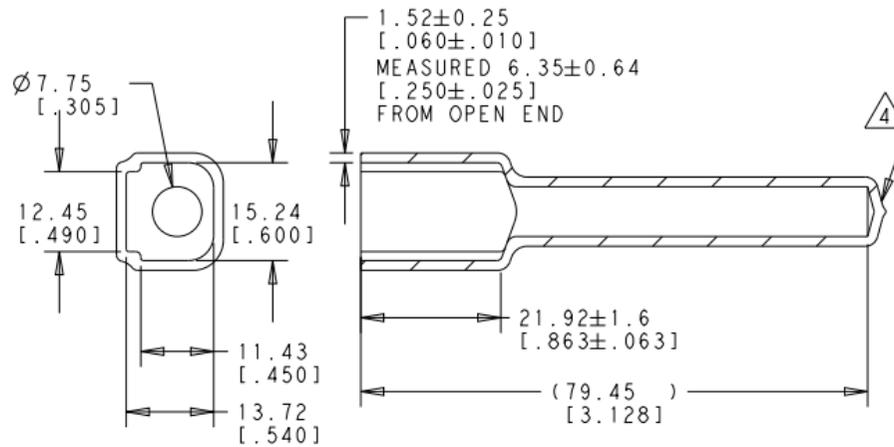


M DTM4P-BT

SCHEDA TECNICA

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
A		NEW RELEASE PER ECO-14-010242	07-07-14	DM	DM
A1		REVISED PER PCN E-20-003641	24FEB2020	AP	IG



- SMALL NON-FILLS ARE ACCEPTABLE INSIDE OF PART, INCLUDING SUPPLIER MARKING.
- TEMPERATURE RATING: -29°C TO +100°C [-20°F TO +212°F]
- THIS ACCESSORY PART IS PROVIDED WITHOUT TYPICAL TRANSPORTATION INDUSTRY PROCESS CONTROLS. NO VALIDATION TESTING HAS BEEN PERFORMED. CUSTOMER IS RESPONSIBLE FOR DETERMINING PRODUCT PERFORMANCE AND SUITABILITY FOR APPLICATION.
- SMALL MATERIAL EXTENSION IS ACCEPTABLE ON THIS END ALL AROUND. WALL THICKNESS ON THIS END MAY VARY.
- THIS PART IS USED ON DTM04-4P RECEPTACLES WITH ANY MODIFICATION THAT DOES NOT INCLUDE AN END CAP.

TE INTERNAL PN	DEUTSCH PN
DTM4P-BT	DTM4P-BT

2019

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

BY TE CONNECTIVITY

© COPYRIGHT 2019

DIMENSIONS:		DWN	07JUL2014	MATERIAL	PVC	FINISH	GRAY
MM [INCHES]		D. MEYER					
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK	07JUL2014	TE Connectivity			
		B. MILLIGAN					
		APVD	07JUL2014	PRODUCT SPEC NAME: BOOT, RECEPTACLE, 4PIN DTM SERIES			
		D. MEYER		APPLICATION SPEC SIZE: A4 CAGE CODE: 4AFU8 DRAWING NO: C=DTM4P-BT RESTRICTED TO: -			
0 PLC	±	WEIGHT 7.00					
1 PLC	±	CUSTOMER DRAWING					
2 PLC	±0.63 [.025]	SCALE 5:4 SHEET 1 OF 1 REV A1					
3 PLC	±						
4 PLC	±						
ANGLES	±5°						

