


M DTM6S-BT

SCHEDA TECNICA

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
A1		REVISED PER ECO-16-008054	05-26-16	DM	DM

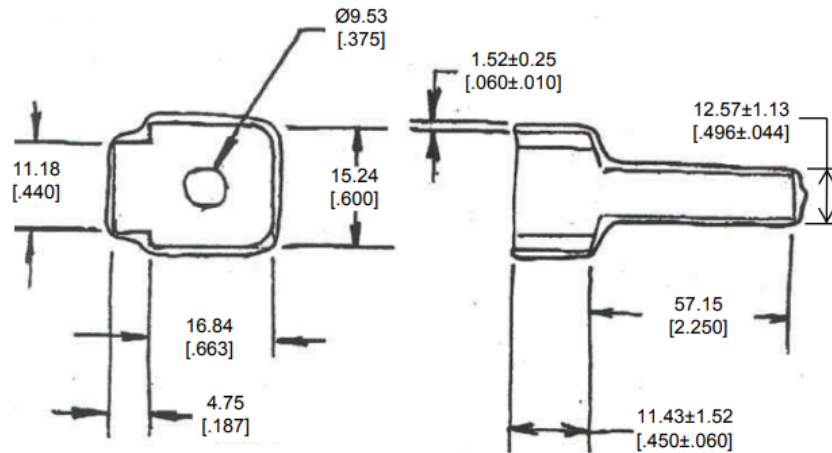

3. PART NO. DTM6S-BT

2. TEMPERATURE RATING: -29°C TO +100°C [-20°F TO +212°F]

1. THIS PART IS USED ON DTM06-6S PLUG WITH ANY MODIFICATION THAT DOES NOT INCLUDE AN END CAP.

RELEASED FOR PUBLICATION 2014

ALL RIGHTS RESERVED.

THIS DRAWING IS UNPUBLISHED.
© COPYRIGHT 2014 BY TE CONNECTIVITY

DIMENSIONS: MM [INCH]		DWN D. MEYER 07JUL2014	MATERIAL PVC	FINISH GRAY
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK B. MILLIGAN 07JUL2014		
0 PLC ±		APVD D. MEYER 07JUL2014		
1 PLC ±		PRODUCT SPEC	NAME BOOT, PLUG, 6PIN DTM SERIES	
2 PLC ± 0.63 [0.025]		APPLICATION SPEC	SIZE A 4	CAGE CODE 4AFU8
3 PLC ±			DRAWING NO C- DTM6S-BT	RESTRICTED TO -
4 PLC ±				
ANGLES ± 5°		WEIGHT 6.00 g		
		Customer Drawing	SCALE NONE	SHEET 1 OF 1 REV A1

