


## FUSIBILI JAPAN SERIE BTL LUNGHI

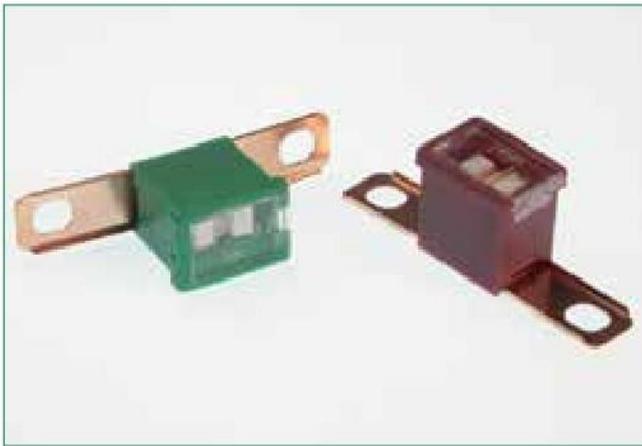

### Description

PAL fuses are commonly found on many Japanese and domestic built vehicles.

### Specifications

Voltage Rating: 32 VDC  
Current Cycling: 24°C  
The fuses satisfy the performance requirements after 50% of the rated current is applied for 10,000 cycles. Each cycle consists of an interrupted current with the pattern of 5 minutes ON and 10 minutes OFF.  
Operating Temperature Range: -40°C to +125°C

Complies with JASO 0612

### Time-Current Characteristics

% of Rating	Opening Time Min / Max (s)
110	14,400 s
200	5 s / 100 s
350	0.2s / 7 s
600	0.040 s / 1 s

### Ratings

Part Number	Current Rating (A)	Body Color
M FU-BTL30	30	PINK
M FU-BTL40	40	GREEN
M FU-BTL50	50	RED
M FU-BTL60	60	YELLOW
M FU-BTL70	70	BROWN
M FU-BTL80	80	BLACK
M FU-BTL100	100	BLUE
M FU-BTL120	120	WHITE

### Dimensions

Dimensions in mm

