


FUSIBILI LOW-PROFILE


Ratings

Current Rating	Housing Material Color	Cold Resistance	Pt
5 A	Orange	17.21	22
7.5 A	Brown	10.65	53
10 A	Red	7.59	102
15 A	Blue	4.70	198
20 A	Yellow	3.35	420
25 A	White	2.56	613
30 A	Green	2.06	1110

Time-Current Characteristic Curves

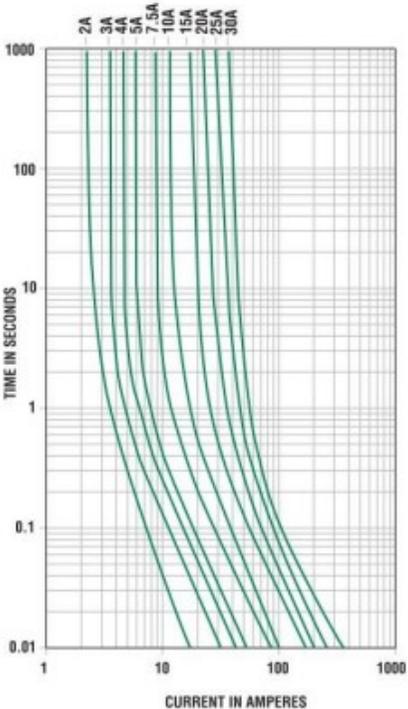

Temperature Derating Curve

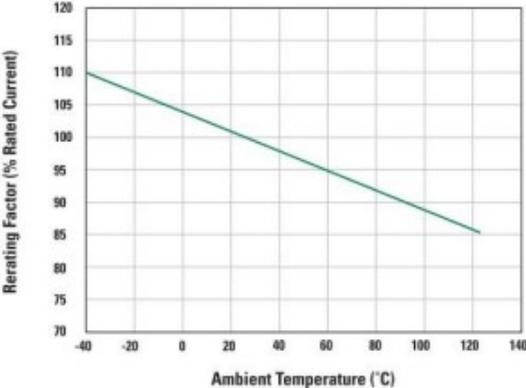




### Specifications

Voltage Rating: 58 VDC  
 Interrupting Rating: 1000A @ 58 VDC  
 Operating Temperature Range: -40°C to +125°C  
 Terminals: Ag plated zinc  
 Housing Material: PA66

### Dimensions

Dimensions in mm

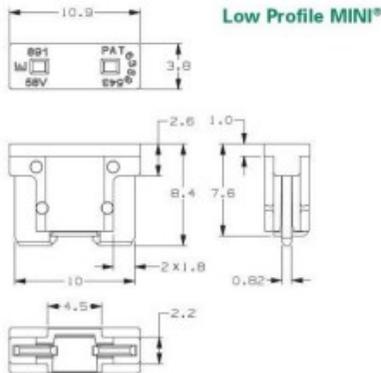

### Description

The Low Profile MINI® fuse has similar performance characteristics as the standard MINI® fuse. The lower overall height allows for more space and weight savings. The Low Profile MINI® fuse is designed to mate with tuning-fork terminals, which provides additional weight and material savings in fuse box designs by eliminating the need for female box terminals.

### Time-Current Characteristics

% of Rating	Opening Time Min / Max (s)
110	360,000 s / -
135	0.750 s / 120 s
200	0.150 s / 5 s
350	0.080 s / 0.250 s
600	0.030 s / 0.100 s

