



M LED2166 - luce led B/A/R 12/24 volt di posizione

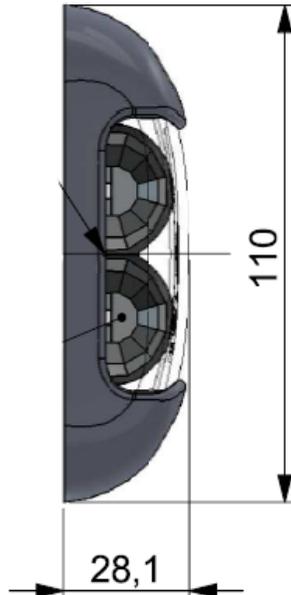

mes connettori
componenti per il cablaggio

LED light	yes	Light category	marker		
Side	universal	Supply voltage	12/24 V	Power rating	1/2,2 W
LED quantity	6	Front position light	yes	Rear position light	yes
Side marker light	yes	Operating temperature range	from -30°C to +50°C		

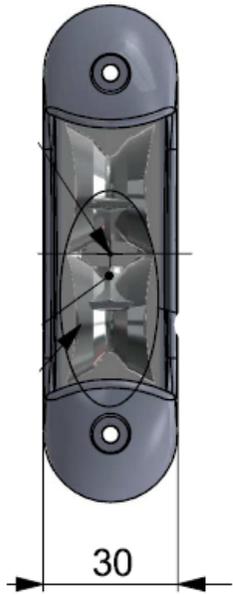