

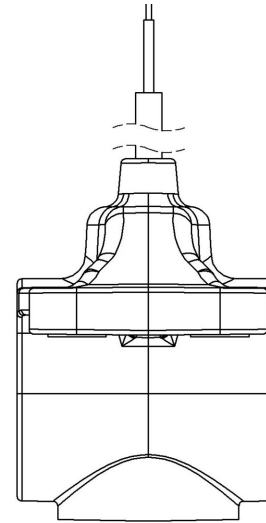


M LED3110-DX - luce led B/A/R 12/24 volt di posizione a pendolo con staffa dx

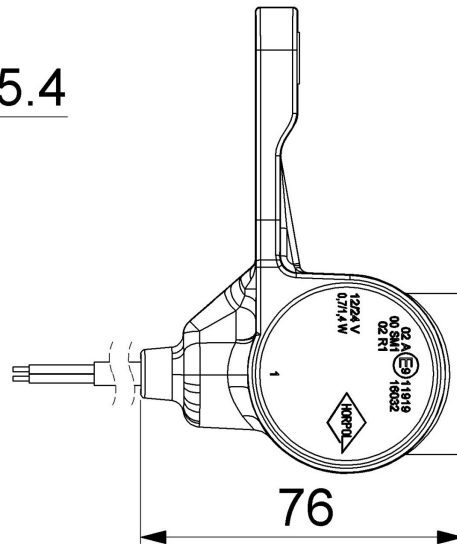

Light group	LED quantity	Light category
HOR 77A	4	marker
Supply voltage	Front clearance light	Power rating
12/24 V	yes	0,7/1,4 W
Rear clearance light	Operating temperature range	Cable
yes	from -30°C to +50°C	2×0,75 mm ² ; cable length 0,6 m
Side marker light	Side	LED light
yes	right	yes
Ingress protection rating		
IP 68		

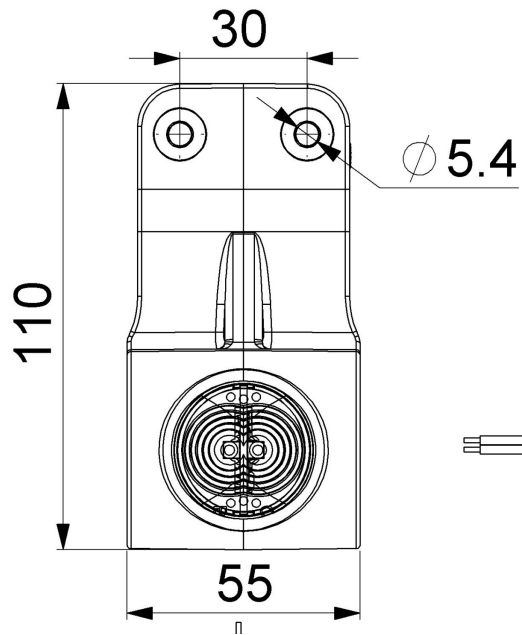