


# M LED6168-L

# SCHEDA TECNICA

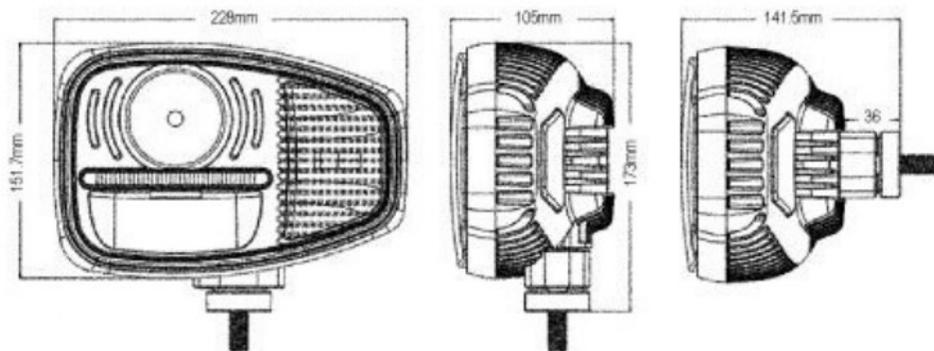

## LEFT HAND DRIVE VEHICLES ONLY

Suitable for Mainland Europe

High Beam: 5200 Lumens, 44W | Low Beam: 2600 Lumens, 22W | DRL: 850, 7W Lumens

12-24 Volts

16 LEDs

IP68 Rated

ECE Approved Reg 6 | Reg 10 | Reg 87 | Reg 112

Polycarbonate Lens

Die Cast Aluminium Housing

Stainless Steel Bracket Mount | M10 Bolt

Plug-In Connection

200mm Cable

269m Beam Distance

Operating Temperature: -40C to +60C

Dimensions: 228\*106\*173mm

Current Draw @ 12V 3.5A (high) | 1.8A (low) | 0.5A (DRL) | 0.5A (indicator)

Current Draw @ 24 V 1.7A (high) | 0.9A (low) | 0.3A (DRL) | 0.3A (indicator)

SCHEMA ELETTRICO FILI

Black – Earth  
White - DRL  
Blue – Indicator  
Brown – Low beam  
Red – High beam

