

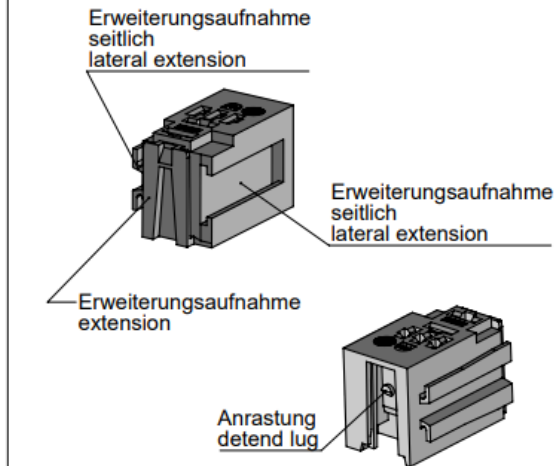
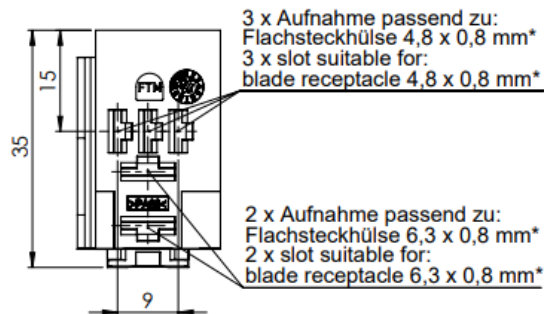


M PR70002 - Porta microrelè con innesti frontali senza staffa (terminali M42238-A + M015168)




Z (2 : 1)

Kammerbezeichnung auf Rückseite
socket aperture designation rear



Montage durch Anrastung
Assembly by snap-on mounting

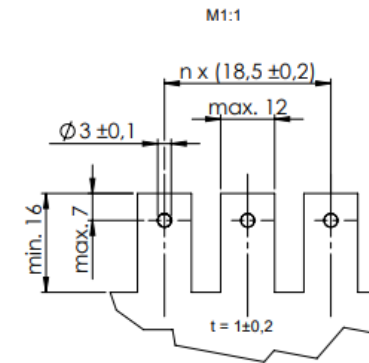

1 Technical data

max. operating voltage :

60 VDC / 25 VAC

operating temperature:

-40°C to 85°C

material:

PA66

flammability:

PA66 HB nach UL 94

weight:

approx. 8 g

receptacle:

3 x flat push-on receptacle 4,8 mm

2 x flat push-on receptacle 6,3 mm

according to DIN 46340

according to ISO 7588-3

tab arrangement:

* Flachsteckhülsen nach DIN 46340; Steckbild nach ISO 7588-2
* blade receptacle according DIN 46340; tab arrangement according ISO 7588-2