



porta rele' di potenza con staffa

1. Technical data

Max operating voltage:	60 VDC / 25 VAC
Operating temperature:	- 40 to 85 °C
Material:	PA66 GF30
Flammability	PA66 GF30 HB UL94
Weight:	approx. 23 g
Receptacle:	2 x flat push-on receptacle 9,5 mm x 0,8 mm according to DIN 46340 3 x flat push-on receptacle 6,3 mm x 0,8 mm according to DIN 46340 4 x flat push-on receptacle 2,8 mm x 0,8 mm according to DIN 46340
Tab arrangement:	according to ISO 7588-2 deviant using flat push-on receptacle 9,5 mm x 0,8 mm

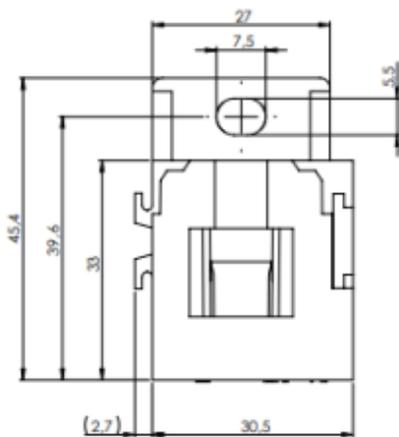

4 x Aufnahme passend zu:
Flachsteckhülse 2,8 x 0,8 mm*
4 x slot suitable for:
blade receptacle 2,8 x 0,8 mm*

3 x Aufnahme passend zu:
Flachsteckhülse 6,3 x 0,8 mm*
3 x slot suitable for:
blade receptacle 6,3 x 0,8 mm*

2 x Aufnahme passend zu:
Flachsteckhülse 9,5 x 0,8 mm*
2 x slot suitable for:
blade receptacle 9,5 x 0,8 mm*

