

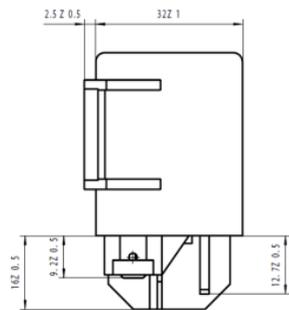


# M PWR1247500N

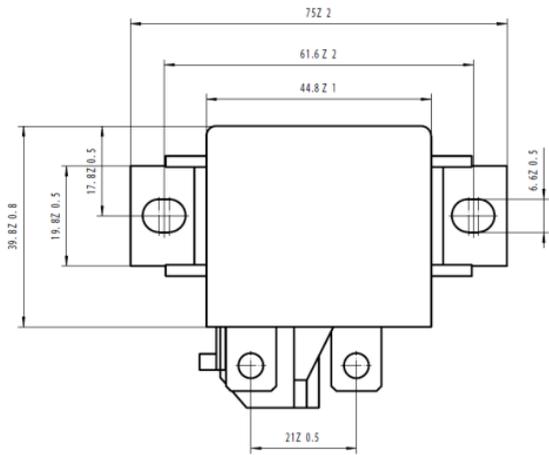

## Circuit Diagram



Nominal Coil Voltage: 12V  
Rated Current (Coil): 150mA  
Power Consumption: 1.8W  
Coil Resistance: 80 Ohm +/-10%  
Contact Type: Normally Open  
Contact Material: Tungsten  
Nominal Current: 75A  
Operation Life Electrical: 100.000  
Operation Life Mechanical: 1.000.000  
Operating Temperature: -40 to +85°C  
Storage Temperature: -40°C to +155°C  
Pulling Time: <10 ms  
Drop Out Time: <10 ms  
Weight: 95g  
Insulation Resistance: 100 M Ohm  
Shock Resistance Functional: 98 m/s<sup>2</sup> (10g)  
Shock Resistance Destructive: 980 m/s<sup>2</sup> (100g)  
Vibration Resistance: 20Hz to 200Hz, 98 m/s<sup>2</sup> (10g)

# SCHEDA TECNICA

