



M PWR12580100

SCHEDA TECNICA

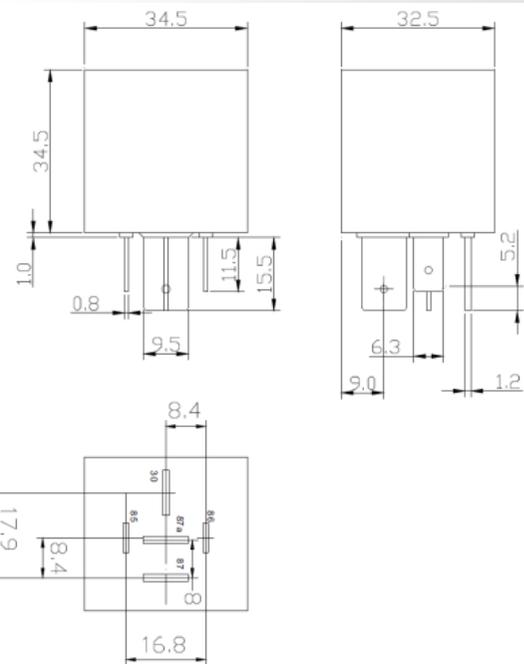

Terminal width Coil : 6.3mm; Contact : 9.5mm

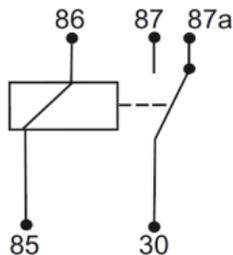

- Nominal Coil Voltage: 12V
- Rated Load Current: 80/100A
- Contact Type: Change Over
- Enclosure Type: Dust Cover
- Feature: Sealed
- Power Consumption: 2.9W Approx.
- Coil Resistance: 195 Ohm +/- 10%
- Contact Material: Silver Alloy
- Contact Resistance: 30mOhm Max.
- Switch Voltage: DC 75V Max.
- Operate Time (Initial): 10ms Max. Typical
- Release Time (Initial): 5ms Max. Typical
- Insulation Resistance: 100MOhm Min. (500V DC)
- Dielectric Strength: 500V AC (50Hz/min)
- Weight: 60g Approx.
- Vibration Resistance: 1.5mm Double Amplitude; 10-40Hz
- Ambient Temperature: -40°C to 85°C
- Humidity: 45-85% RH
- Operation Life Mechanical: 10,000,000
- Operation Life Electrical: 100,000 (At rated load)

