M PWR2447000R

SCHEDA TECNICA

Dimensions

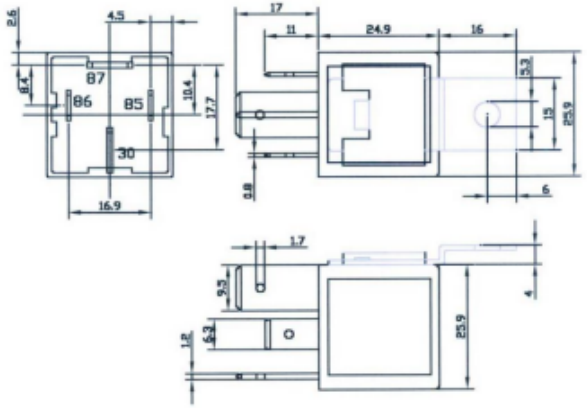

Nominal Coil Voltage: 24V

Rated Load Current: 70A

Contact Type: Normally Open

Feature: Resistor

Enclosure Type: Metal Bracket Dust Cover

Coil Resistance: 200 Ohm +/- 10%

Operating Voltages: 18,0V - 30,0V

Must Operate Voltage: <= 14,4V

Must Release Voltage: >= 3,2V

Ambient Temperature: -40°C to 85°C

Operation Life Electrical: 100,000 (At rated load)





mes connettori

componenti per il cablaggio