M STD1244000RST

SCHEDA TECNICA

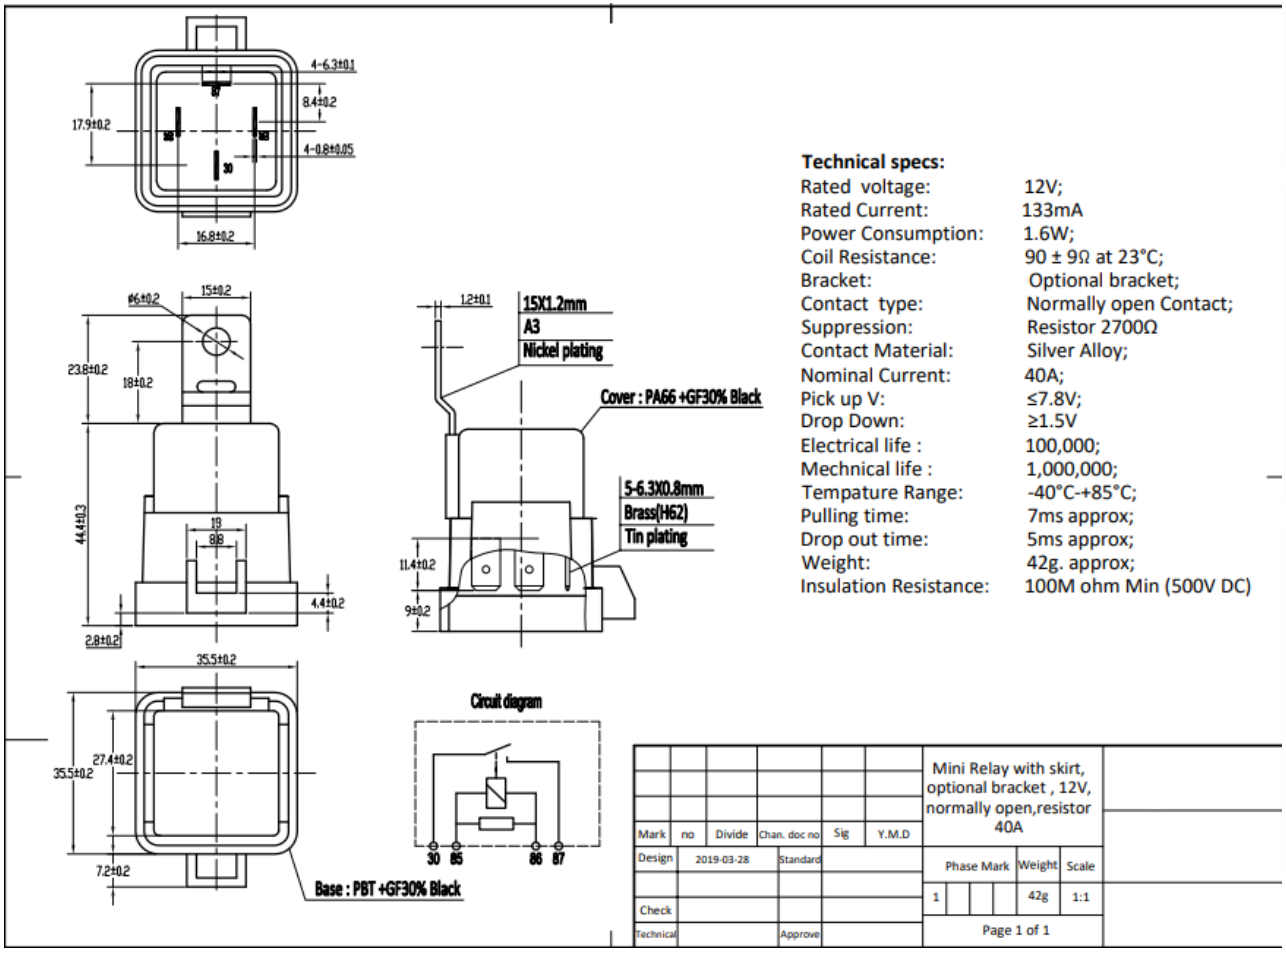

Technical specs:

Rated voltage:	12V;
Rated Current:	133mA
Power Consumption:	1.6W;
Coil Resistance:	90 ± 9Ω at 23°C;
Bracket:	Optional bracket;
Contact type:	Normally open Contact;
Suppression:	Resistor 2700Ω
Contact Material:	Silver Alloy;
Nominal Current:	40A;
Pick up V:	≤7.8V;
Drop Down:	≥1.5V
Electrical life :	100,000;
Mechnical life :	1,000,000;
Tempature Range:	-40°C-+85°C;
Pulling time:	7ms approx;
Drop out time:	5ms approx;
Weight:	42g. approx;
Insulation Resistance:	100M ohm Min (500V DC)

Mark	no	Divide	Chan. doc no	Sig	Y.M.D
Design		2019-03-28	Standard		
Check					
Technical			Approve		

Mini Relay with skirt, optional bracket , 12V, normally open,resistor 40A

Phase Mark	Weight	Scale
1	42g	1:1

Page 1 of 1

mes connettori

componenti per il cablaggio