

M T.35.405.2


SCHEDA TECNICA

Description **Part Number**



TIMER RELAY DELAY REVERSER W/RESET

T.35

Outline Dimension

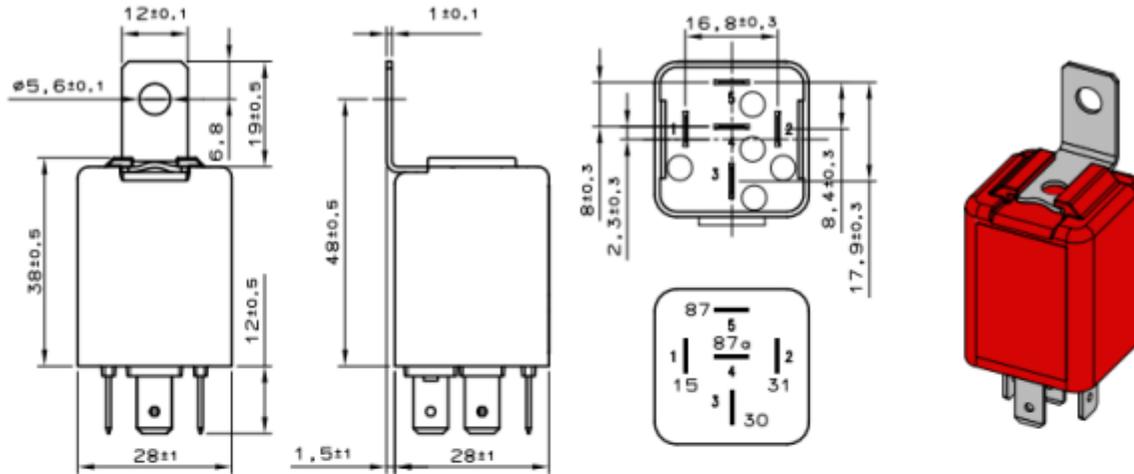

Connection **Delay Diagram**

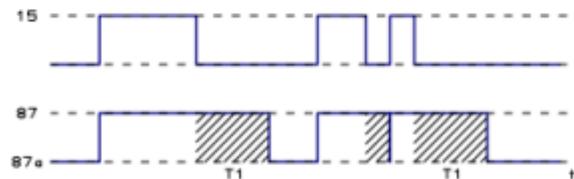

Contacts Data **Coil Data**

Rated Voltage	Contacts Arrangement	Rated Current	Switching Voltage
24 VDC	SPDT	10A(87) 15A(87a)	MAX 30V DC

Coil Code	Rated Voltage	Operate Voltage	Coil Resistance
405	24VDC	≤18V	360Ω

Other Data

Operating Temperature	-40°C / +80°C
Weight	30 grams
Electrical Lifetime	200.000 Operations
IP	IP54

Operating Voltage	205	405
	9V - 15V	18V - 30V
Mechanical Lifetime	1.000.000 Operations	
Terminals / Assignment	ISO-8092 / ISO-7588	

Materials

Base	PA 6,6 + 30% Glass Fiber White
Housing	PA 6,6 + 30% Glass Fiber Red

Terminals	Cu Zn Sn
Metal Bracket (Optional)	Steel CK67

