SCHEDA TECNICA

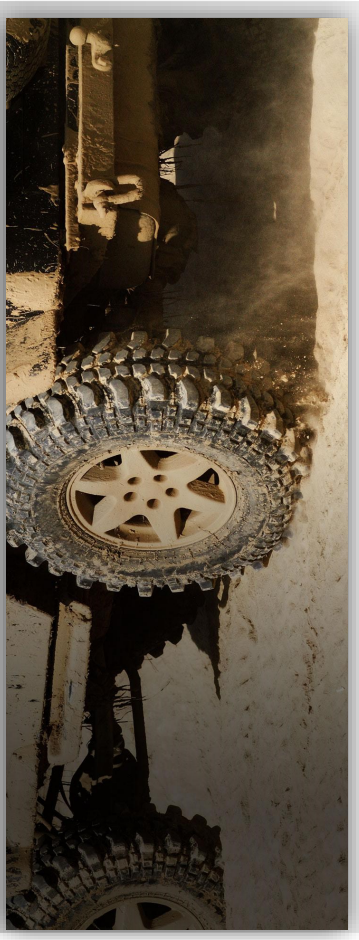

mes connettori
componenti per il cablaggio

M UMC1252030N

Outline dimensions

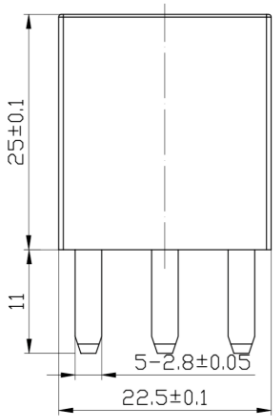



Circuit Diagram



Technical Specifications

Rated Voltage	12 V
Nominal Operating Power (Coil)	1.8 W (rated current: 150 mA)
Relay Type	Changeover, sealed
Nominal Switching Current	20 A (NC) / 30 A (NO)
Contact Material	AgSnO2
Ambient Temp. Range	-40 °C .. +85 °C
Mechanical Life	> 5 000 000
Electrical Life	> 100 000
Housing Material	PA66+GF30
Base Material	PA66+GF30
Terminal Material	H62 Y2, tin plated
Sealing Material	Epoxy, black
Unit Weight	19.5 g