


## GIUNTO TERMORESTRINGENTE BLU CON STAGNO 1,0-2,5 MM

### M 9003

#### SPECIFICATION CONTROL DRAWING

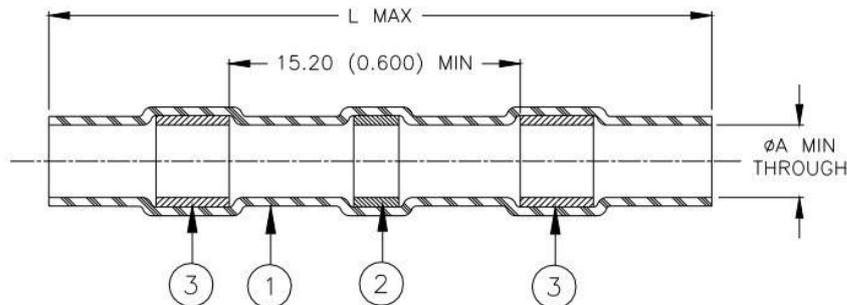

Product Name	Size Code Color Items 3	Product Dimensions		Conductor Dimensions		Selection Guide			
		L max	øA min	øB		Total mm <sup>2</sup>		Total CMA	
				min	max	min	max	min	max
<b>M 9001</b>	Clear	26.0 (1.025)	1.7 (0.065)	0.4 (0.015)	1.7 (0.065)	0.3	0.8	450	1500
<b>M 9002</b>	Red	42.0 (1.655)	2.7 (0.105)	1.3 (0.050)	2.7 (0.105)	0.8	2.0	1250	3500
<b>M 9003</b>	Blue	42.0 (1.655)	4.5 (0.180)	1.8 (0.070)	4.5 (0.180)	2.0	4.0	2500	7200
<b>M 9004</b>	Yellow	42.0 (1.655)	6.0 (0.235)	2.8 (0.110)	6.0 (0.235)	4.0	6.0	6100	19000
<b>M 9005</b>	Grey	42.0 (1.655)	7.0 (0.275)	3.2 (0.125)	7.0 (0.275)	6.0	10.0	12000	25000

#### MATERIALS

- INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked modified polyolefin. Transparent clear.
- SOLDER PREFORM WITH FLUX:  
SOLDER: TYPE CD18 per ANSI/J-STD-006.  
FLUX: TYPE ROM1 per ANSI/J-STD-004.
- MELTABLE RINGS: Thermally stabilized thermoplastic. Color: see table.

#### APPLICATION

- These controlled soldering devices are designed to splice tin-plated or bare copper stranded wires rated for at least +85°C.
- Temperature range: -55°C to +125°C.

For best results, prepare the wires as shown:

